

FRC



HIGH INTENSITY **SCENE LIGHTING** CATALOG

LED AND HALOGEN SCENE LIGHTING / LAMPHEADS / MOUNTS / ACCESSORIES AND MORE

SAFE  FLEET
Driving Safety Forward™



SUPERIOR LIGHTING



BETTER EQUIPPED TO FIGHT

Fire Research Corporation (FRC) offers cutting-edge safety solutions for fire, rescue, and emergency services. FRC has been manufacturing safety products for over 50 years. Our safety equipment, controls, instrument displays, scene lights, video and recording systems, and apparatus accessories all promote a safer working environment at the scene, on the road, or in the station.

LED SCENE LIGHTING

Spectra™	5
Spectra™ Surface Mount	6
Spectra MAX™	7
Spectra MAX™ Surface Mount	7
Spectra MAX-S™	8
Spectra HR™	9
Spectra MS™	10
Spectra™ Slim Profile	11

RECESSED & SURFACE MOUNTS 12

Spectra™ Surface Mount	12
Spectra™ 900 Surface Mount	12
Spectra™ 950 Surface Mount	12
Evolution II™ Surface Mount	12
Focus® Surface Mount	12

LIGHTING MOUNTS 13

Portable Base	13
Portable Demountable	13
Evolution II™	15
Focus®	16
Crestlight™	19
LED Brow Mounts	21
UltraBright™	23
Twistlock™	24

PORTABLE LED LIGHTING 25

Spectra Mobile™	25
-----------------	----

TELESCOPIC POLES 27

TwistLock™ Telescopic Poles	27
Kwik-Raze® Telescopic Poles	29

LIGHTING OPTIONS 35

ORDERING INSTRUCTIONS 37

SPECIALTY LIGHTING 38

Firefly™	38
SoBrite™	39
DuroLumen™	41
Sunstrip™	42
WorkPro™	43
Vantage Point™	44

UPGRADE TO LED LIGHTING 45

THE FRC DIFFERENCE

Fire Research Corporation (FRC) was founded in 1968 and has been manufacturing innovative products designed for the Fire and Safety Industry ever since. Safety equipment, controls, instrument displays, scene lights and station accessories are shipped to truck builders, dealers, and fire departments throughout the world. Whether they are used at a scene during operations, for training, or in the station house, our products are specifically designed to promote a safer and more professional working environment.

- ▣ FRC LED lights are more efficient and use less power, provide more light and have a longer life. FRC LED's are capable of lasting well past the lifetime of the average apparatus
- ▣ FRC introduced the first LED designs/products to the market
- ▣ FRC offer more variety of scene lighting and accessory options compared to competitors
- ▣ FRC LED lampheads are designed to operate in a color temperature range that is as close to natural daylight as possible
- ▣ FRC uses an exclusive optical lens designed to control and focus the light efficiently, placing the light evenly where first responders need it
- ▣ FRC lights utilize an innovative heat sink designed to transform heat from the lamphead providing superior performance
- ▣ FRC lights are brighter, environmentally friendly, energy efficient, contain no mercury, and produce less heat
- ▣ FRC products designed, hand-built and tested in Nesconset, New York USA

FRC LIFETIME WARRANTY

FRC offers a lifetime warranty for all Spectra Series*, Evolution II, CrestLight and SoBrite products installed on fire or emergency medical services apparatus. Visit the FRC website at fireresearch.com for terms and conditions.

*Excludes Model KR700 Portable, Model 600 Tripod Series, and Spectra Mobile






EXPERIENCED

FRC, a Safe Fleet company, manufactures safety products for fire, rescue, and emergency services. At the scene, on the road, or in the station, FRC safety equipment, controls, instrument displays, scene lights, video and recording systems, and apparatus accessories all promote a safer working environment.

Safe Fleet is a leading global provider of safety solutions for fleet vehicles serving major markets including Emergency, Military, Industrial, Work Truck, Waste, Truck/Trailer, and Bus/Rail/RV. For more information on the Safe Fleet family of brands, visit www.safefleet.net.



Driving Safety Forward™



SCHOOL BUS



TRANSIT



LAW ENFORCEMENT & MILITARY



FIRE & EMS



WORK TRUCKS



TRUCK & TRAILER




WASTE & RECYCLING



CONSTRUCTION

"SURE GRIP" HANDLE STAYS COOL TO THE TOUCH WHEN HOLDING LAMPHEAD

FLOOD LED (TOP & BOTTOM ROWS) ILLUMINATE THE WORK AREA

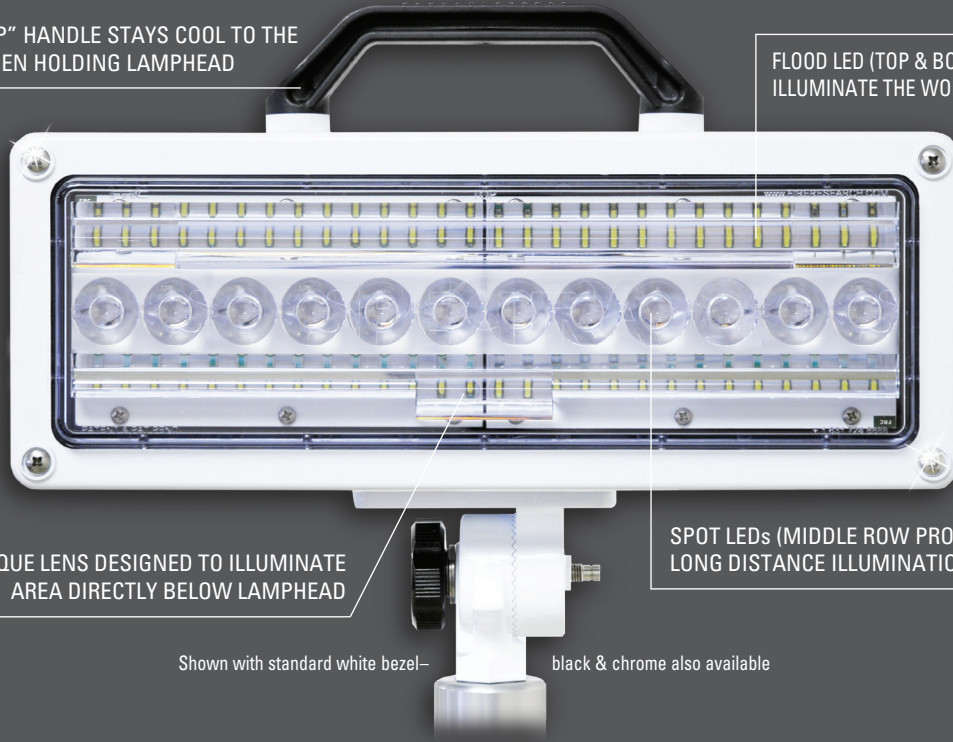

UNIQUE LENS DESIGNED TO ILLUMINATE AREA DIRECTLY BELOW LAMPHEAD

SPOT LEDs (MIDDLE ROW PROVIDE LONG DISTANCE ILLUMINATION

Shown with standard white bezel—

black & chrome also available

SPECTRA™

20,000 LUMENS OF BRIGHT LIGHT

SPECTRA FEATURES



- Slimmest LED profile in the industry
- Unique combination of flood/spot LEDs
- Instant-on at full intensity
- Longer LED life rated at 50,000 hours
- Available in 15,000 or 20,000 lumens
- Innovative cooling fins provide higher efficiency
- Available on FRC pole, brow, fixed or surface mounts

PUTS ALL LIGHT DIRECTLY ON THE WORK AREA & SCENE BEYOND



Three rows of LEDs - Top and bottom rows are flood LEDs designed to light up the work area. The middle row of focused spot LEDs provide long distance illumination.


SPECTRA's unique lens design provides a smooth and uniform flood and spot combination bringing firefighters the widest light pattern for improved work area visibility as well as illuminating objects at a farther distance.

SPECTRA's advanced lens design and arrangement of powerful LEDs deliver bright LED light where its needed.



SPECTRA LED lampheads output an impressive 20,000 lumens of super bright LED light. The advanced lens and arrangement of LEDs generate a unique combination flood and spot light pattern.

12V/24V UL CE IP68	Q20	12/24 V	18.3/9.2A	20,000	lumens
120V UL CE IP68	K20	120 V	1.8A	20,000	lumens
240V UL CE IP68	J20	240 V	0.9A	20,000	lumens

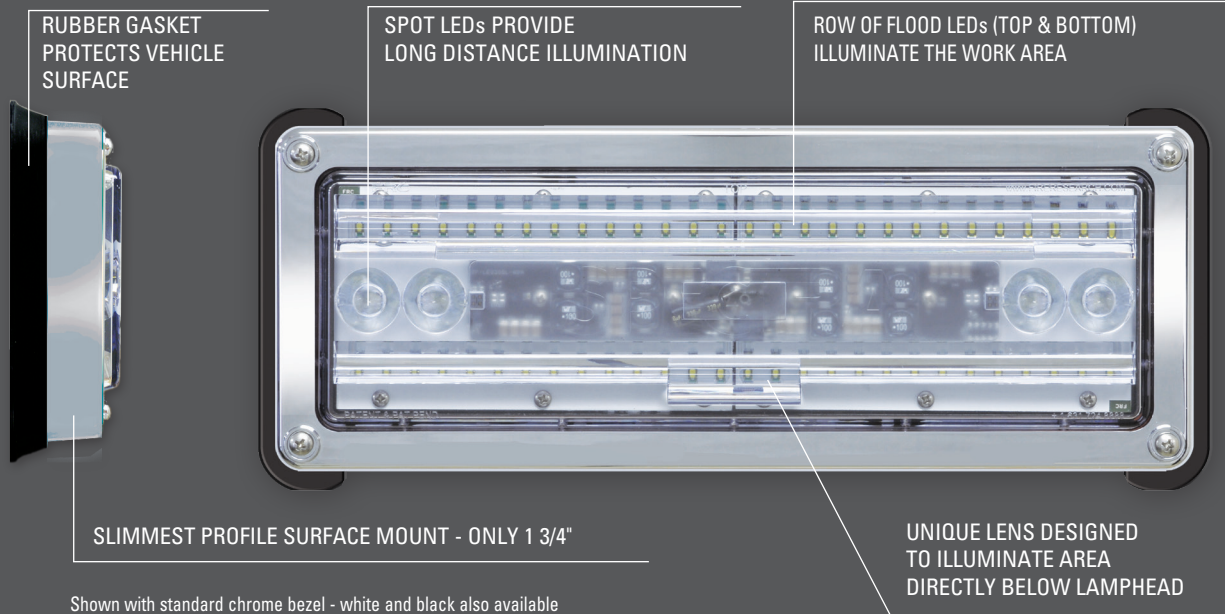

Shown with standard chrome bezel - white and black also available

SPECTRA™ SURFACE MOUNT

15,000 LUMENS OF BRIGHT LIGHT

SPECTRA SURFACE MOUNT FEATURES



- Surface mount LED lamphead generates a combined flood and spot light pattern
- Slim body design depth of only 1 3/4" keeps lamphead closer to vehicle

- Surface mount is easier and faster to install
- Available in 12/24 VDC or 120/240 VAC

AC surface mount model SPA260 requires 6 3/8" w x 4 11/16" h cut-out



SPECTRA SURFACE MOUNT



has an extremely low profile extending less than 1-3/4" from the panel.


12V~24V	CE	Q15	12/24 V	13.9/6.9A	15,000	lumens
IP68						
120V	UL CE	K15*	120 V	1.4A	15,000	lumens
IP68						
240V	UL CE	J15*	240 V	0.7A	15,000	lumens
IP68						

* Surface mount SPECTRA models only

"SURE GRIP" HANDLE STAYS COOL TO THE TOUCH WHEN HOLDING LAMPHEAD

2 ROWS OF INTENSE FLOOD LEDs PROVIDE THE ULTIMATE IN SCENE & WORK AREA ILLUMINATION

CENTER ROW OF BRIGHT SPOT LEDS OFFER LONG DISTANCE ILLUMINATION

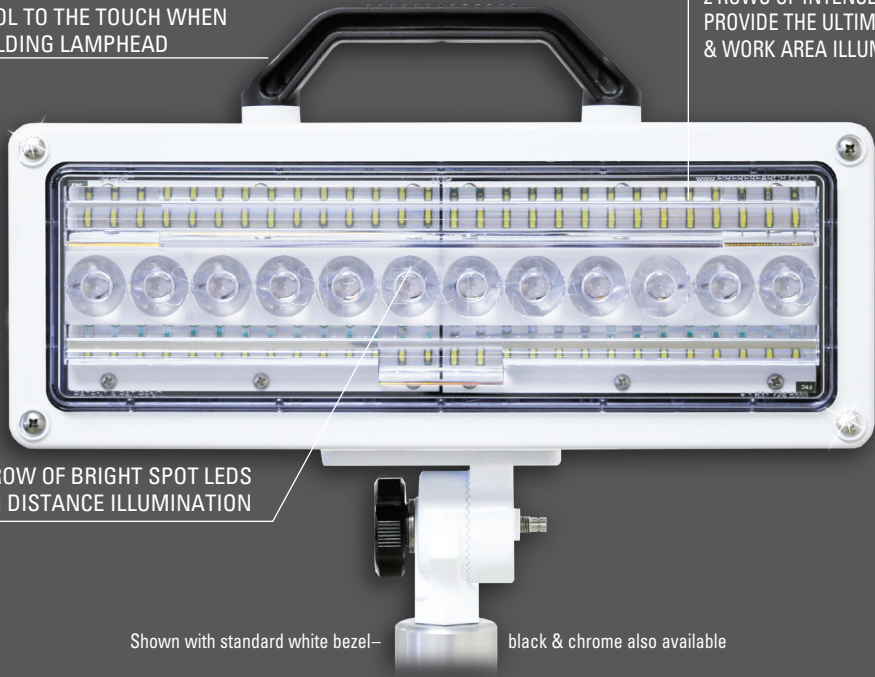

Shown with standard white bezel— black & chrome also available

THE BRIGHTEST LED SCENE LIGHT AVAILABLE

SPECTRA MAX™

FEATURES




- Available in 12/24 VDC or 120/240 VAC
- Choose pole, brow, fixed or surface mounts
- 28,000 lumens of bright light

THE BRIGHTEST SURFACE MOUNTED LED LAMPHEAD AVAILABLE

SPECTRA-MAX SURFACE MOUNT

- 20,000 lumens of ultra bright light to improve vehicle performance

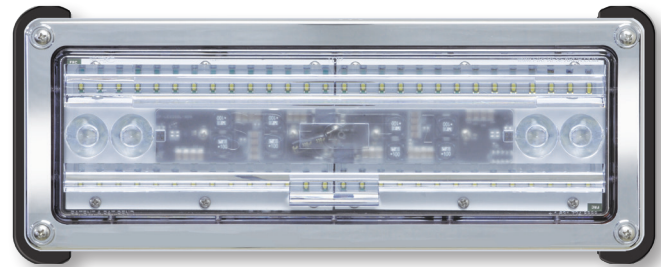


SPECTRA MAX lampheads deliver 28,000 lumens of ultra bright LED light in a uniform light pattern providing maximum scene and work area visibility.

12V=24V IP68 CE	Q20*	12/24 V	13.8/6.9A	20,000	lumens
	Q28	12/24 V	19.2/9.6A	28,000	lumens
120V UL CE IP68	K20*	120 V	1.4A	20,000	lumens
	K28	120 V	1.8A	28,000	lumens
240V UL CE IP68	J20*	240 V	0.7A	20,000	lumens
	J28	240 V	1.4A	20,000	lumens

* Surface mount SPECTRA models only

"SURE GRIP" HANDLE STAYS COOL TO THE TOUCH WHEN HOLDING LAMPHEAD

3 ROWS OF POWERFUL SPOT LEDs ILLUMINATE OBJECTS FARTHER AWAY

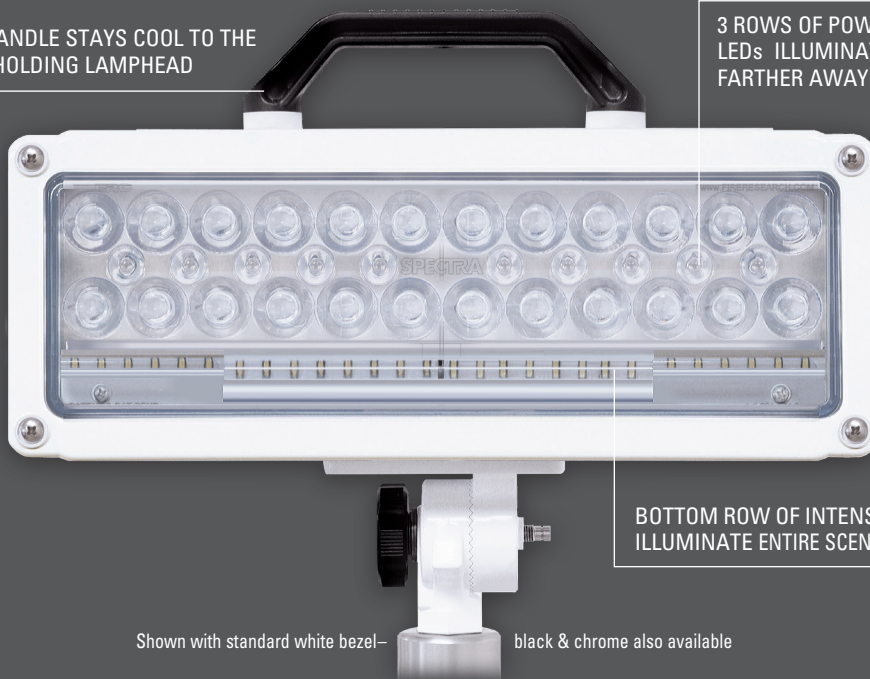

BOTTOM ROW OF INTENSE FLOOD LEDs ILLUMINATE ENTIRE SCENE & WORK AREA

Shown with standard white bezel— black & chrome also available

MAXIMUM SPOT AND FLOOD LIGHT CAPABILITY

SPECTRA MAX-S™

FEATURES




- SPECTRA MAX-S combines a flood light with an intense long-distance spotlight to let you see objects farther away
- Select Spot (14,000 lumens) or Flood (14,000 lumens) Light Patterns or 28,000 lumens Spot/Flood Combination
- Available in 12/24 VDC or 120/240 VAC
- Choose Pole, Brow, or Fixed Mounts

SPECTRA MAX SERIES LAMPHEADS DELIVER MAXIMUM SCENE AND WORK AREA VISIBILITY



SPECTRA MAX lampheads deliver 28,000 lumens of ultra bright LED light in a uniform light pattern providing maximum scene and work area visibility.

12V/24V IP68 CE	A28	12/24 V	20.8/10.4A	28,000 lumens
120V UL CE IP68	B28	120 V	2.8A	28,000 lumens
240V UL CE IP68	C28	240 V	1.4A	28,000 lumens

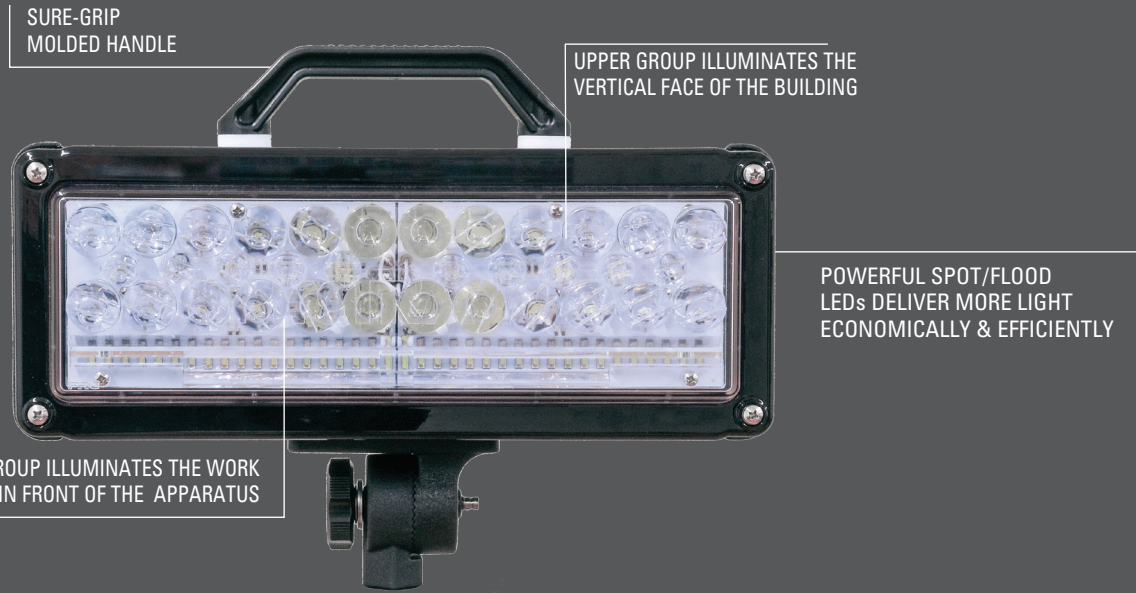

ENGINEERED TO ILLUMINATE TALL BUILDINGS

SPECTRA HR™

FEATURES



- Two distinct groups of lenses are utilized:
 - Upper Group - designed so each lens projects wide beams of light at different angles to cover the entire vertical face of the building
 - Lower Group - designed to illuminate the ground ahead of the apparatus
- Each group can be turned on or off individually
- 72 ultra-bright white LEDs - 34 for the Upper Group and 38 for the Lower Group
- Adjustable, pivoting mounting arm incorporates a round, sturdy, reinforced knurled locking knob
- Sure-Grip molded handle ensures reliable grip every time and keeps the handle cool to the touch
- Lamp head measures 14" (355 mm) W x 3 3/4" (95 mm) D x 5 3/8" (137 mm) H
- Available in both 12/24 VDC and 120/240 VDC, with or without a switch
- Choose from the standard white bezel or the optional chrome or black bezels
- Choice of Pole or Tripod mount with or without a switch
- UL certification

The Spectra HR uses two unique groups of lenses. The upper group projects wide beams at different angles to cover the entire vertical face of the building. At the same time the lamphead's lower group lights the ground area in front of a fire apparatus. Each 28,000 lumen Spectra HR achieves this illumination without lamp adjustment.

240V UL IP68 CE	J28	240 V	1.4A	28,000 lumens
120V UL IP68 CE	K28	120 V	2.8A	28,000 lumens
12V • 24V IP68 CE	Q28	12/24 V	19.2/9.6A	28,000 lumens

SURE-GRIP
MOLDED HANDLE



POWERFUL SPOT/FLOOD
LEDs DELIVER MORE LIGHT
ECONOMICALLY & EFFICIENTLY

COMPACT LAMPHEAD DESIGN -
ONLY 8 3/4" WIDE BY 3 1/4" DEEP

THICKER, REINFORCED
MOUNTING KNUCKLE

Shown with optional chrome bezel— white standard & black also available

SLIM, COMPACT AND POWERFUL SPECTRA MS™

FEATURES





- SPECTRA MS combines spot and flood LEDs for a uniform light pattern
- Compact and Powerful - Measures just 8 3/4" wide by 3 1/4" deep
- Efficient - More LED light using less power
- Economical LED solution for upgrading your vehicle
- Available in 12/24 VDC or 120/240 VAC
- Choose Pole, Brow, or Fixed mounts
- 14,000 lumens of bright light

SPECTRA MS LED lampheads are slim, compact, and provide an efficient 14,000 lumens of bright LED light.

12V~24V IP68 CE	R14	12/24 V	10.8/5.4A	14,000 lumens
120V UL CE IP68	T14	120 V	1.4A	14,000 lumens
240V UL CE IP68	U14	240 V	0.7A	14,000 lumens

SPECTRA 950 PERIMETER ILLUMINATION

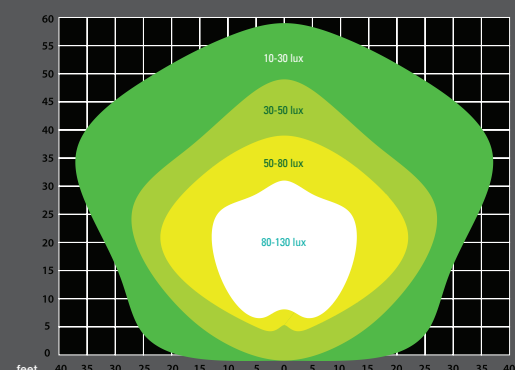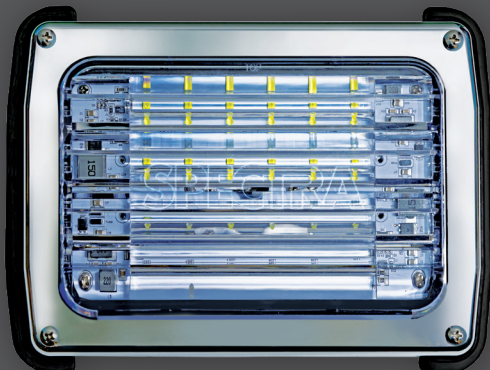

SLIM PROFILE SURFACE MOUNT LESS THAN 2" • COMPACT SIZE 9" x 6 3/4"
 SPECTRA 950 / 900 Shown with standard chrome bezel – black & white also available

Unique SPA950 pattern at 8' height aimed horizontal (0° inclination)

DESIGNED FOR AMBULANCE AND EMERGENCY RESPONSE VEHICLES

SPECTRA™ SLIM PROFILE


FEATURES

- 5,000 lumens of light projects 170° illuminating underneath and across to light up the body of vehicle and immediate work area
- Complex single lens optic design engineered for unmatched performance
- Easy installation, no panel cut-out. Rubber gasket protects vehicle surface
- Operating hours: 50,000+

SPECTRA 900 SCENE ILLUMINATION



- Ultra-Bright 7,000 lumen LED scene lighting using 24 white LEDs
- Innovative lens redirects the light along the vehicle and directly onto the scene
- Easy installation, no panel cut-out
- Heat sink design offers greater light output
- Rubber gasket protects vehicle surface

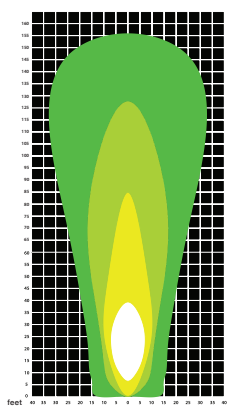

Unique SPA900 pattern at 8' height aimed horizontal (0° inclination)

SLIM PROFILE SURFACE MOUNT LESS THAN 2" • COMPACT SIZE 9" x 6 3/4"



SPECTRA 900 LED was designed specifically to focus all light directly on the scene.


SPECTRA 950 LED casts light underneath and across to illuminate vehicle and work area.

Both lights are easy to install with NO PANEL CUT OUT required.

SPA900, SPA950			
Model	W	D	H
Q70	9	1 3/4	6 3/4

SPECTRA 900 SCENE ILLUMINATION					
Model	V	A	lumens		
Q70	12/24	6.0/3A	7,000		

SPECTRA 950 PERIMETER ILLUMINATION					
Model	V	A	lumens		
T14	12/24	5.0/2.5A	5,000		

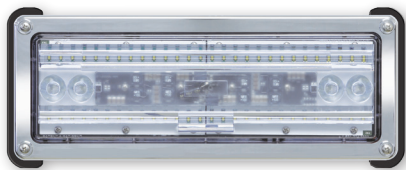

SPECTRA

Lowest Profile LED Surface Mount
Models SPA260 • SPA900 • SPA950

- LEDs generate a unique combined flood & spot light pattern
- Available in 15,000 lumens Spectra and 20,000 lumens Spectra Max
- Available in 12/24 VDC or 120/240 VAC
- AC surface mount model SPA260 requires a 6 3/8" w x 4 11/16" h cut-out

SURFACE MOUNTS AVAILABLE FOR SPECTRA Q15, K15, J15 & SPECTRA MAX Q20, K20, & J20




SPECTRA 900

Slim Profile LED Surface Mounts

- Ideal scene light for ambulance and emergency response vehicles
- Ultra-bright 7,000 lumens of light

Easy installation, requires no panel cutout. Slim profile less than 2" deep

SURFACE MOUNTS AVAILABLE FOR SPECTRA 900 Q70

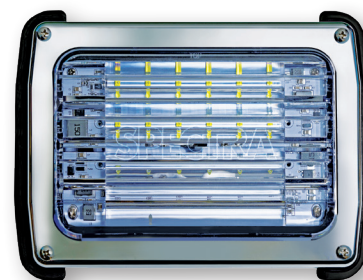

SPECTRA 950

Slim Profile LED Surface Mounts

- Ideal perimeter light for ambulance and emergency response vehicles
- Ultra-Bright 5,000 lumens of light

Easy installation, requires no panel cutout. Slim profile less than 2" deep

SURFACE MOUNTS AVAILABLE FOR SPECTRA 950 Q50




EVOLUTION II

Generates 15,000 lumens of Bright Light
Model FCA210

Recess requires only 2" of depth

SURFACE MOUNTS AVAILABLE FOR SPECTRA Q15, K15, J15 & SPECTRA MAX Q20, K20, & J20

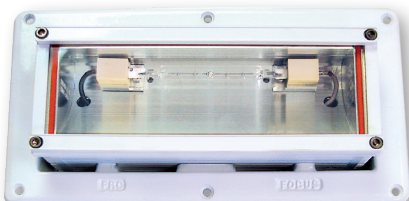

FOCUS

Model FCA200

RECESSED LIGHTS AVAILABLE FOR FOCUS D15, D30, H30, S30, S50, S75, M10, M12

PORTABLE BASE

MODEL KR-700

- Grab-and-run versatility
- Cast aluminum portable base
- Available with any AC light fixtures
- LED lampheads provide more light per watt than traditional quartz halogen fixtures



-HD Hold Down Assembly

Lamphead with portable base easily stores in most vehicle compartments or storage areas

Wire guard comes standard for Focus lampheads



PORTABLE DEMOUNTABLE


DM OPTION

- Combines the benefits of a telescoping pole and a 700 Series portable light
- Hold-down assembly fastens light to permanently-mounted baseplate (-HD)
- Mounted on any of the telescoping poles
- On/Off switch standard
- Add suffix -DM to complete pole mount
- Also available without pole

LAMPHEAD DIMENSIONS


SPA100, SPA500, SPA600, SPA.700

Model	W	D	H	H ₂
Q15, Q20, Q28, K20, K28,				
J20, J28, A28, B28, C28	14	3 3/4	11	5 3/8
R14, T14, U14	8 3/4	3 1/4	11	6 1/2

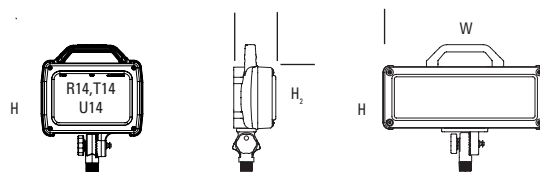

SPA260

Model	W	D	H	W ₂	D ₂	H ₂
Q15, Q20	14 1/2	1 3/4	5 7/8	-	-	-
K15, K20, J15, J20	14 1/2	1 3/4	6	6 3/8	1 13/16	4 11/16




AC surface mount requires a cut-out

SPA800


Model	W	D	H	D ₂ Max
Q15, Q20, Q28, K20, K28,	14	*	5 7/8	*
J20, J28, A28, B28, C28				
R14, T14, U14	8 3/4	*	6 1/2	*

* Measurement varies depending upon cab model

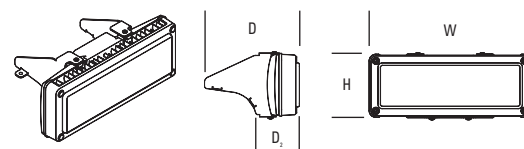


SPA850

Model	W	D	H	D ₂
Q15, Q20, Q28, K20, K28,	14	7 5/8	5 3/4	3 5/8
J20, J28, A28, B28, C28				
R14, T14, U14	8 3/4	7 1/2	6 3/4	3 1/4



SPA830

Model	W	D	H
Q15, Q20, Q28, K20, K28,	14	4 3/4	6
J20, J28, A28, B28, C28			
R14, T14, U14	8 3/4	4 3/16	6 1/2

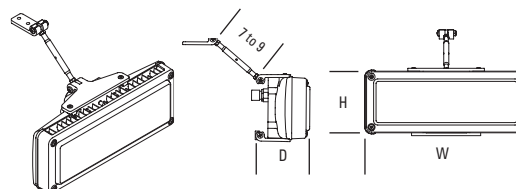



SURE-GRIP MOLDDED HANDLE

ULTRABRIGHT LED ARRAYS

UNBALANCED KNOB DESIGN REDUCES THE CHANCE OF LOOSENING UP IN ROUTE

THICKER, REINFORCED MOUNTING KNUCKLE

ADVANCED LENS DESIGN FOCUSES 100% OF THE LED LIGHT DIRECTLY WHERE IT IS NEEDED MOST

THE COST EFFECTIVE, AFFORDABLE LED SOLUTION

EVOLUTION II™

FEATURES



- Brighter Light - More than 20,000 lumens of ultra bright led light
- Whiter Light – Closest thing to natural sunlight
- Uniform high quality white light with the widest light pattern
- Long Operating Hours – Rated at 50,000 hours
- Parabolic reflector and lens designed to direct all the light onto the scene
- Lamphead can be used with 12 or 24 volt DC systems (13/6.5 amps)
- Full Brightness at Power On – Instant restarts

EVOLUTION II low profile LED lampheads generate up to 20,000 lumens of ultra bright white light. The unique LED arrays and lens produce more usable light in a compact lamphead.



V11	12/24 V	7.5/3.75A	11,000 lumens
V15*	12/24 V	11.0/5.5A	15,000 lumens
V20	12/24 V	13.0/6.5A	20,000 lumens


*Recessed Evolution II model only

Advanced Lens Design **See All the Action Further Away!**



The EVOLUTION II lens focuses more LED light on the scene and objects far away.

SURE-GRIP
MOLDED HANDLE

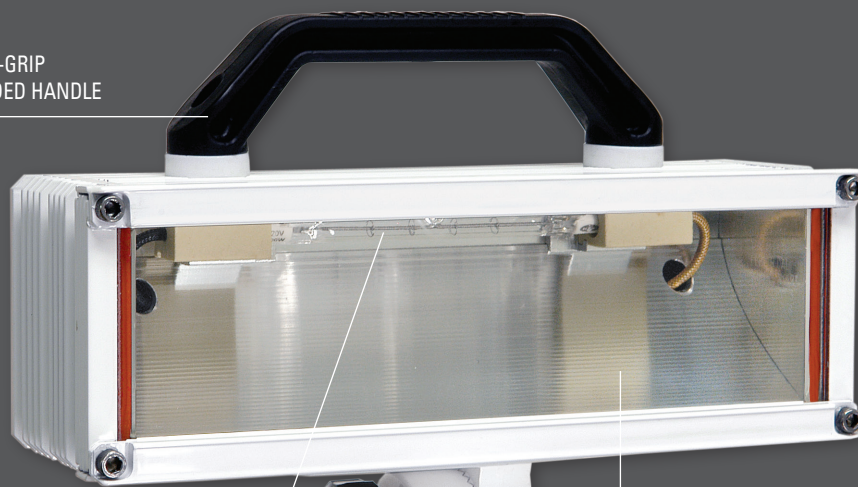

STANDARD T3 QUARTZ BULB
IS LOCATED AT TOP OF REFLECTOR
TO MAXIMIZE LIGHT EMISSION

UNIQUE FOCUS REFLECTOR LIGHTS UP
EMERGENCY SCENE EVENLY

UNBALANCED KNOB DESIGN REDUCES
THE CHANCE OF LOOSENING UP IN ROUTE

THICKER, REINFORCED
MOUNTING KNUCKLE

FOCUS[®] VERSATILE LOW PROFILE LAMPHEAD


**THE LOW PROFILE FOCUS
LAMPHEAD PROVIDES MANY
MOUNTING CHOICES.**

- Telescopic Pole
- Fixed
- Brow
- Recessed
- Portable
- Under Aerial

DON'T WASTE PRECIOUS LIGHT

The high intensity FOCUS lamphead uses a uniquely designed patented reflector to eliminate wasted light. It is designed to focus 100% of the light produced into the area where it is needed. Built tough, the compact design allows it to be mounted in places that traditional lighting fixtures do not fit.

ADVANCED TECHNOLOGY

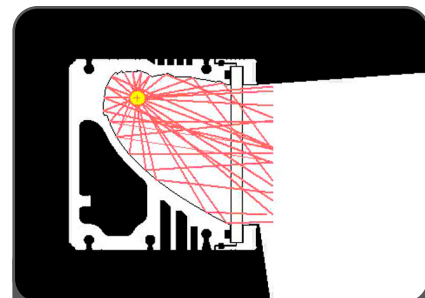

A cross section of the FOCUS lamphead showing its unique reflector surfaces that redirect light waves for even, bright scene lighting where it's most needed.

FOCUS low profile lampheads were the first lampheads to introduce the concept of re-directing light with fifty parabolic curved and aimed surfaces. The innovative design directs light where it is needed. The low profile of the classic FOCUS offers mounting options that many other lights cannot.


12V+24V CE	■ D15	150W	12V	12.5A	2,600	lumens
	■ D30	300W	12V	25.0A	5,200	lumens
	■ H30	300W	24V	12.5A	5,000	lumens
* Models FCA800, FCA830, and FCA850 only						
120V UL CE	■ S30	300W	120V	2.5A	5,900	lumens
	■ S50	500W	120V	4.2A	10,500	lumens
	■ S75	750W	120V	6.3A	19,600	lumens
	■ M10	1000W	120V	8.3A	22,000	lumens
240V UL CE	■ S72	750W	240V	3.1A	16,100	lumens
	■ M12	1000W	240V	4.2A	22,000	lumens
	■ M15	1500W	240V	6.25A	35,000	lumens



LAMPHEAD DIMENSIONS


FCA100, FCA500, FCA600, FCA700

Model	W	D	H	H ₂
V11	7 5/8	5 3/16	9	3 5/16
V20	11 1/2	5 3/16	9	3 5/16
D15, H30, S30, S50, S75, S72	10	5	9	3 5/16
D30	11 1/2	5 3/16	9	3 5/16
M10, M12, M15	15	5	9	3 5/16

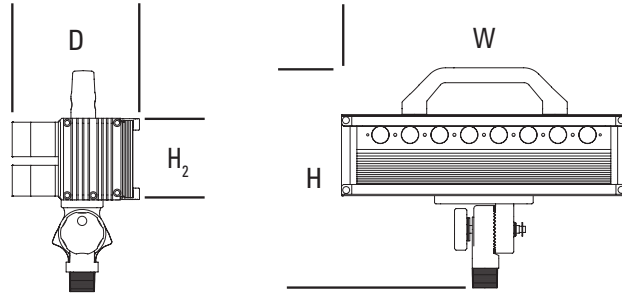


FCA200, FCA210

Model	W	D	H	W ₂	D ₂	H ₂
FCA200						
D15, H30, S30, S50	11	2	5 5/8	9 3/4	1 15/16	4 1/4
D30, M10, M12	17 1/2	2	5 5/8	15 7/8	1 15/16	4 1/4
FCA210						
V15	13 7/8	2	5 7/8	12 1/2	1 15/16	4 1/2
S75, S72	13 7/8	2	5 7/8	12 1/2	1 15/16	4 1/2

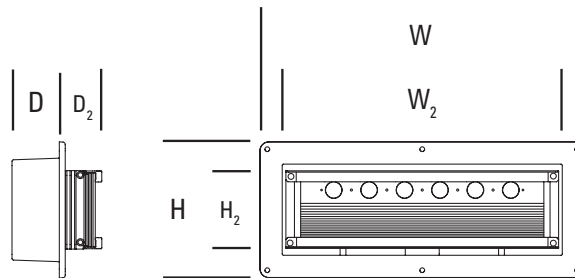

FCA300


Model	W	D	H	D ₂
V20	11 1/2	6 1/2	3 7/8	5
D15, D30, H30, S30, S50, S75, S72	11 1/2	6 1/2	3 7/8	5
M10, M12, M15	15	6 1/2	3 7/8	5

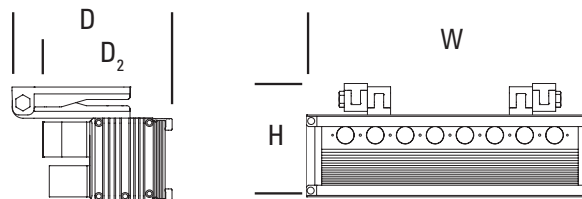

LAMPHEAD DIMENSIONS


FCA800

Model	W	D	H	D ₂ Max
V11	7 5/8	9 5/16	4 3/4	5 5/16
V20	11 1/2	9 5/16	4 3/4	5 5/16
D15, D30, H30, S30, S50, S75, S72	11 1/2	9 5/16	4 3/4	5 5/16
M10, M12, M15	15	9 5/16	4 3/4	5 5/16

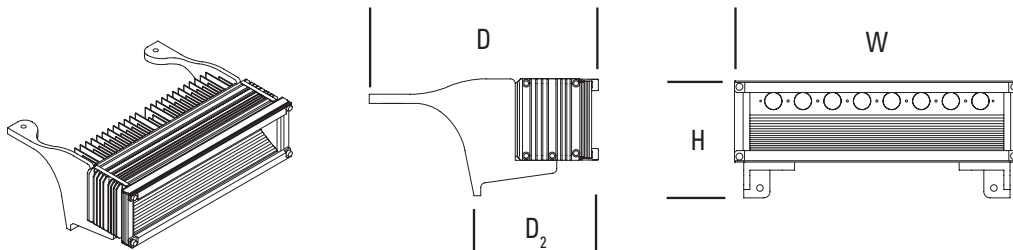


FCA850

Model	W	D	H	D ₂
V11	8 1/8	7 1/2	3 5/8	5 3/16
V20	12	7 1/2	3 5/8	5 3/16
D15, H30, S30, S50, S75, S72	12	7 1/2	3 5/8	5
D30	12	7 1/2	3 5/8	5 3/16
M10 M12 M15	15 1/2	7 1/2	3 5/8	5 3/16

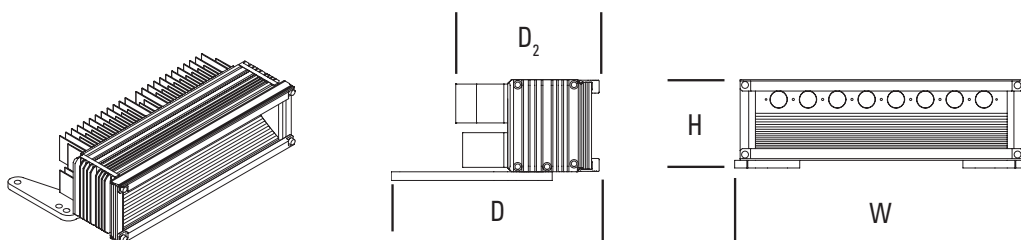

FCA830

Model	W	D	H
V20	11 1/2	5 3/16	4 5/8
D15, D30, H30, S50, S72	11 1/2	5 3/16	4 5/8
M10, M12, M15	15	5 3/16	4 5/8

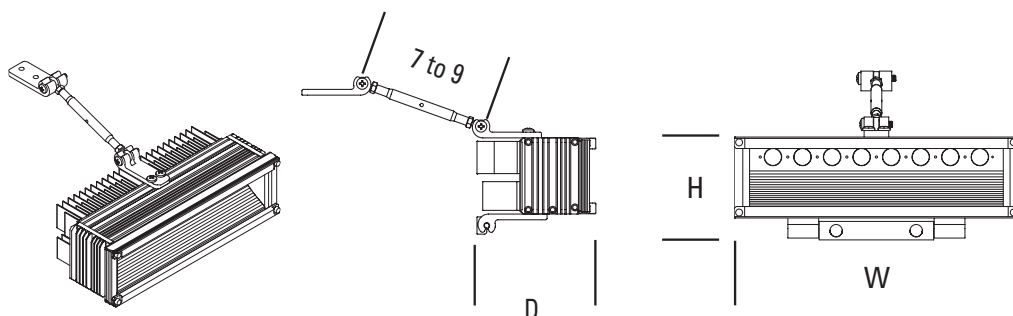



CRESTLIGHT™ THE BEST BROW LIGHT FOR THE JOB

FEATURES



- Lowest profile scene light in the industry at just under 2"
- Only brow lighting in the industry with individual low beam optic LED's
- Built in DOT marker light
- Available in white or black powder coated housing
- Independent control for the marker, flood and low beam LEDs
- Ideal for working vehicle scenes
- Will not blind passing traffic or emergency personnel on the opposite side of the scene


CHOOSE THE MODEL THAT'S BEST FOR YOU

CLA100 - white narrow flood, white low beam, amber DOT marker or CLA101 without DOT markers

CLA101 - A68	71.6" long	CLA101 - Same as above without Amber DOT	17,800 lumens
CLA100 - A62	65.2" long	White narrow flood, white low beam, amber DOT marker	16,100 lumens
CLA101 - A62	65.2" long	CLA101 - Same as above without Amber DOT	16,100 lumens
CLA100 - A49	42.5" long	White narrow flood, white low beam, amber DOT marker	12,500 lumens
CLA101 - A49	42.5" long	CLA101 - Same as above without Amber DOT	12,500 lumens
CLA100 - A14	17.5" long	White low beam	2,600 lumens

EXCLUSIVE LOW-BEAM LENS DIRECTS FLOOD LIGHT OUT AND DOWNWARD.


Low beam light projection on a typical 8' (2.5 m) high apparatus will provide forward coverage up to 150' (45 m) and side coverage to 60' (18 m) wide.

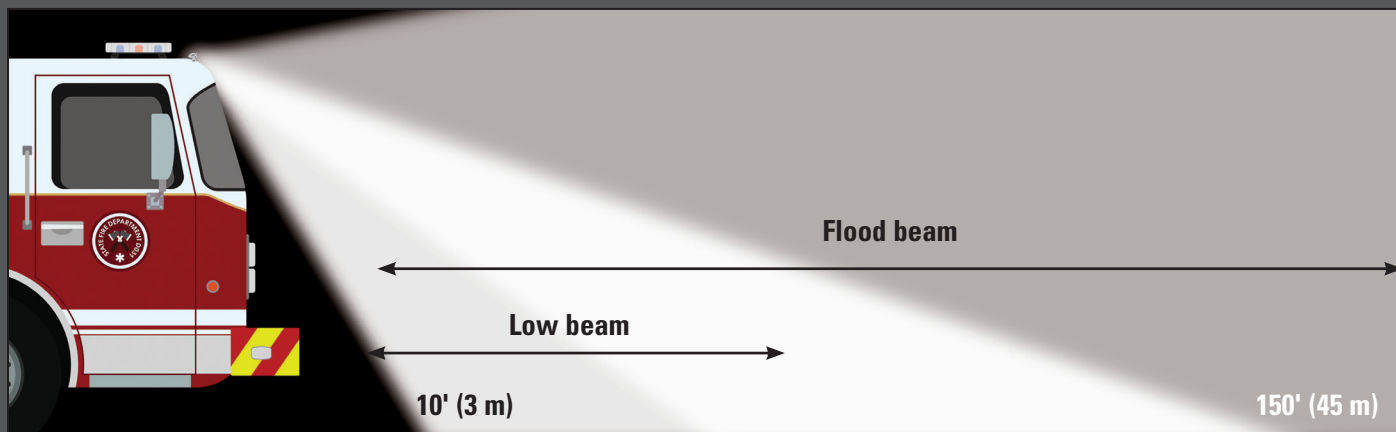

CrestLight low profile LED scene lights provide the flexibility to offer the proper light for the job. The CrestLight is a combination of three different lights, white narrow flood, white low beam, and amber DOT markers.

12V•24V	Model	Voltage	Current	Lumens
■	A14	12/24 V	4.2/2.1A	2,600 lumens
■	A49	12/24 V	13.7/6.8A	12,500 lumens
■	A62	12/24 V	17.5/8.7A	16,100 lumens
■	A68	12/24 V	19.5/9.7A	17,800 lumens


Model		A	B	C	D	E
		Width w/ Bracket	Mounting Holes	Height w/ Bracket	Height w/o Bracket	Depth
CLA100-A14	inch	17 1/2	16 9/16	3	1 13/16	3 5/16
	mm	444.5	420.7	76.2	46.1	84.1
CLA100-A49 CLA101-A49	inch	52 1/2	51 5/8	3	1 13/16	3 5/16
	mm	1308.1	1311.3	76.2	46.1	84.1
CLA100-A62 CLA101-A62	inch	65 1/4	64 3/8	3	1 13/16	3 5/16
	mm	1657.4	1635.1	76.2	46.1	84.1
CLA100-A68 CLA101-A68	inch	71 5/8	70 3/4	3	1 13/16	3 5/16
	mm	1819.4	1797.1	76.2	46.1	84.1

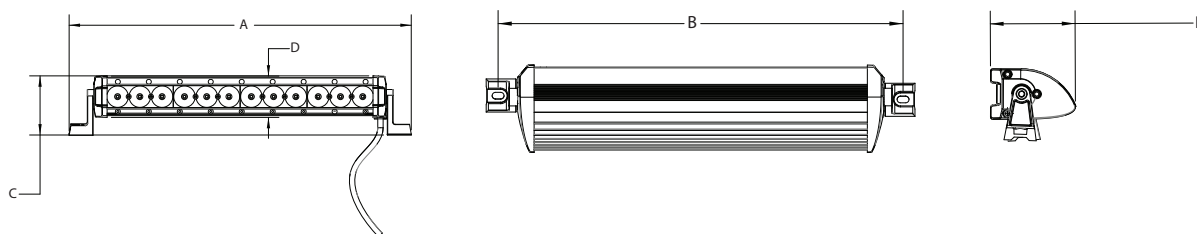



LED BROW MOUNTS

HIGHLY EFFICIENT LEDS PROVIDE FIVE-TIMES MORE LIGHT THAN HALOGEN BULBS

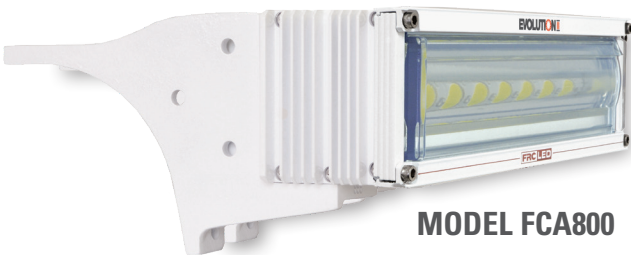

MODEL FCA800

TURN NIGHT INTO DAY

Arrive at a nighttime scene and power-up your new SPECTRA or EVOLUTION II brow mounted LED lampheads for the brightest light. Perfect for new and existing vehicles.

BROW LIGHTS ARE AVAILABLE WITH THE FOLLOWING LAMPHEADS:

SPECTRA: Q15, Q20, J20, K20

EVOLUTION II: V11, V20

SPECTRA MAX: Q28, J28, K28

SPECTRA MAX-S: A28, B28, C28

FOCUS: D15, D30, H30, S30, S50, S75, M10, M12, M15

SPECTRA MS: R14, T14, U14



MODEL SPA850
FLAT MOUNT

CONTOUR, UNIVERSAL & FLAT MOUNTING

PERFECT FOR MOUNTING ON ROOF OF CAB

BROW LIGHTING FEATURES

- UltraBright Illumination
- Light up the scene quickly upon arrival
- Very low profile
- Available for SPECTRA SERIES, EVOLUTION II and FOCUS

UNIVERSAL MOUNT


DESIGNED TO MOUNT ON ANY CAB

- Universal mounting bracket easily installs on all apparatus



MODEL SPA830


CONTOUR BROW MOUNT

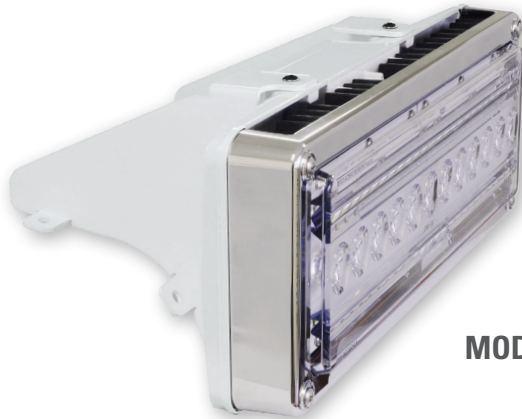


MODEL SPA800

FLAT MOUNT

DESIGNED TO MOUNT ON ANY FLAT SURFACE

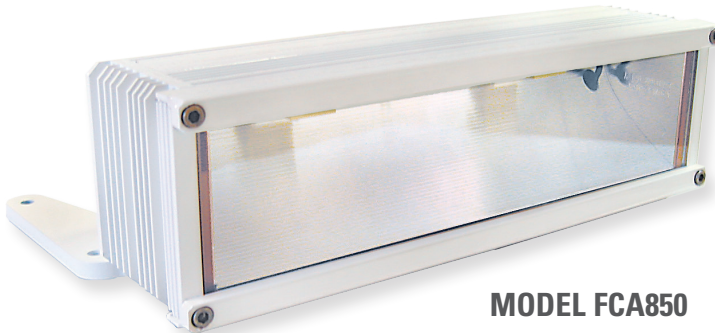

MODEL FCA850

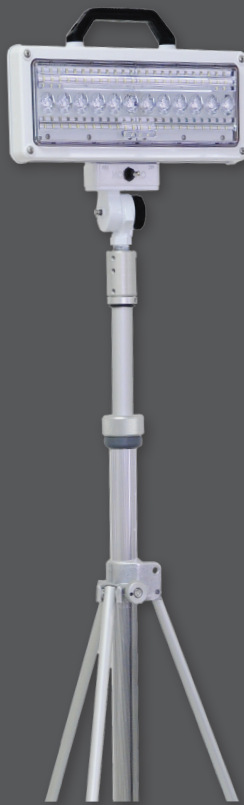


SPECTRA TRIPOD ULTRABRIGHT

THE ONLY 28,000 LUMEN AC POWERED LED LAMPHEAD AVAILABLE.


FRC Tripods are Available with the Following Lampheads: SPECTRA: J20, K20
SPECTRA MAX: J28, K28
SPECTRA MAX-S: B28, C28

SPECTRA MS: T14, U14
FOCUS: S30, S50, S75, M10, M12, M15

OPTIONAL QUICK RELEASE TRIPOD BRACKETS

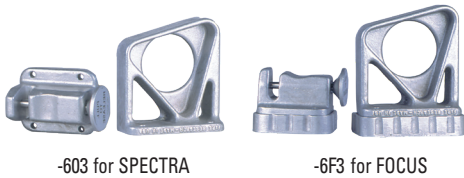

- The 603 bracket sets consist of a small triangular bracket for the feet and a QUICK RELEASE spring loaded dead-bolt lock to hold the tripod at its midpoint
- The brackets can be used on the exterior of a vehicle or in a compartment
- The 6F3 has spacers needed for FOCUS lampheads




-603D for SPECTRA /
-6F3D for FOCUS

- Similar to the 603, the dual bracket consists of a small triangular bracket for the feet and a DUAL QUICK RELEASE spring loaded dead-bolt lock to hold the tripod at its midpoint. The lock can be released from either side.

Tripod Bracket Dimensions

All Dimensions In Inches* FOCUS Lampheads Require the included 7/8" spacer.

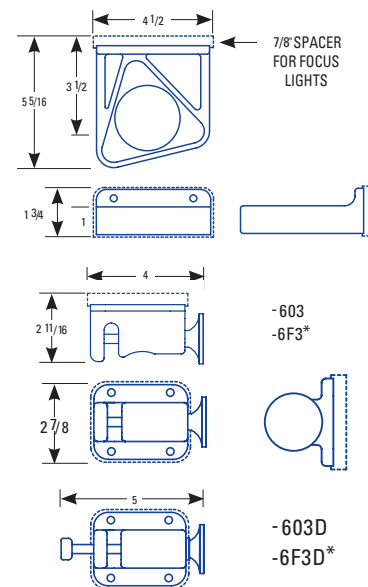


TWISTLOCK

TELESCOPIC TRIPODS

TWISTLOCK TELESCOPIC TRIPODS

The Industry's Finest Tripods with the Best Features:

- **TwistLock** – FRC's unique locking ring operates from either direction. It is simply the best way to deploy a light with the gloved hand!
- **Air Cushioned pole release** – This innovation allows the pole to lower slowly, when released, on a cushion of air. This helps to prevent pinched fingers and damage to the bulb.
- **Ease of set-up** – FRC tripods are designed to deploy all three legs at the same time, allowing the unit to be set up quickly and easily at an incident.
- **Lightweight anodized aluminum poles** – The standard tripod weighs just 16 pounds!
- **Extends up to 12 feet!** – Fire Research tripods are designed to permit "overextension" of its legs so the tripod's lamphead can reach this incredible height.
- **Cammed knobs** – The pole tightening knob will not unscrew or come off due to vibration.
- **Anti-chatter legs** – Rubber covers at the bottom of the legs ensure a quiet ride.
- **Small footprint** – When closed the unit sets into an incredibly small lower bracket allowing ease of mounting just about anywhere!
- **Truck mountable** – All tripods are truck mountable, allowing them to be used as telescoping lights on the vehicle and off!
- **Wire Guard** – As shown is standard.

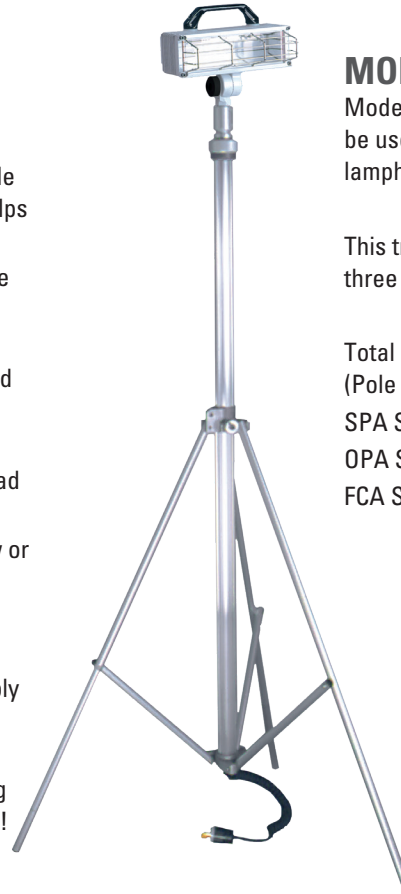

MODEL 600

Model 600 is a standard tripod that can be used with either SPECTRA or FOCUS lampheads.

This tripod is supplied with a NEMA L5-15 three prong TwistLock plug.

Total Height of Model 600 with Lamphead (Pole & Legs Retracted)

SPA Series = 72" high



OPA Series = 69" high

FCA Series = 69" high

	600	656	642
A	59	45 1/4	31 3/4
B	99	73 1/2	48 3/8
C	75 1/8	61 1/2	44 3/4
D	115 1/8	89 3/4	61 3/8
E	43 1/2	43 1/2	30 1/2

NOTE: The tripod comes with the power cord exiting from the bottom of the pole. For the power cord to exit from the top of the pole add the -TW option. When the -TW option is installed add 1" to the lamphead dimension and on a standard pole add 8" to dimensions B and D.

Tripod shown from side view with quick release truck mount bracket set

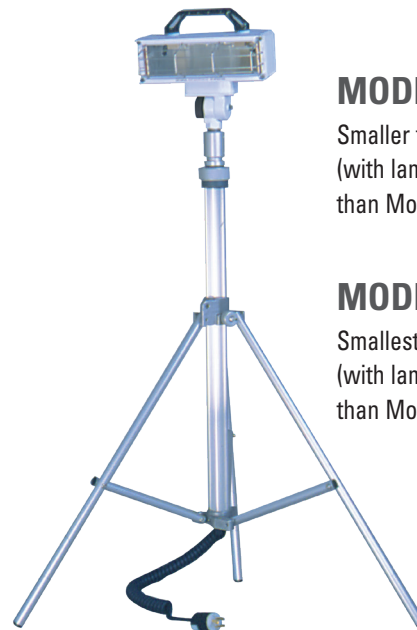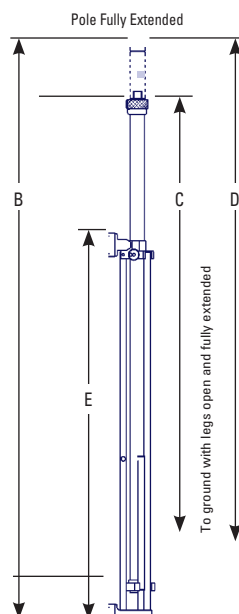

MODEL 656

Smaller tripod, overall length (with lamphead) is 14" smaller than Model 600.

MODEL 642

Smallest tripod, overall length (with lamphead) is 27" smaller than Model 600.



DESIGNED FOR AMBULANCE AND EMERGENCY RESPONSE VEHICLES
SPECTRA MOBILE™

FEATURES

- 15,000 lumens Spectra lamphead
- Compact lamphead design
- Plunging and hanging spike
- Rubber hanging strap
- Kick stand
- Pole mountable
- 5-light operating modes
- Compatible with Milwaukee® battery, 18v, 12Ah
- Low battery alerts with a “Double Flash” when the voltage starts to reach a low level. Light will automatically turn off when the battery level is low. 12Ah rechargeable battery is compatible with other battery operated tools you may already own

- Rubber strap for hanging the light
- Compact lamp head design only 8 3/4" (222 mm) wide by 3 3/4" (95 mm) deep
- Lexan® lens
- Aluminum pole mount receiver
- ABS molded handle
- 5 position switch
- Retractable spike can be used as a hook to secure the light
- 12Ah rechargeable battery
- Stainless steel legs
- Kick stand



OPERATING MODES

- On-Flood
- 1st toggle-spot
- 2nd toggle-warm/medium
- 3rd toggle-amber
- 4th toggle-flashing amber
- Down-off
- Hold the switch in any of the operating modes to switch from Full - Medium - Low

12 Ah Battery Specifications:

	Full	Mid	Low
Flood	1:40	4:20	12:00
	15000 lumens	5500 lumens	2000 lumens
Spot	4:30	9:00	21:30
	5000 lumens	2500 lumens	1000 lumens
Warm	2:10	4:20	12:00
	9800 lumens	5400 lumens	1800 lumens
Amber	2:40	5:20	21:30
	6000 lumens	3500 lumens	1000 lumens

Times are listed in Hours:Minutes


Specifications:

Dimensions	8 3/4" (222 mm) wide by 3 3/4" (95 mm) deep
Weight	11 lbs. (5 kg) (with battery)
Materials	Lexan lens ABS molded handle Stainless steel legs, kick stand, spike Aluminum pole mount receiver

Model Numbers:

SPA710-P15	Spectra Mobile LED 15,000 lumens scene light, with battery and charger
SPA710option-NB	Spectra Mobile LED 15,000 lumens scene light only (battery and charger not included)

TWISTLOCK TELESCOPIC POLES



MODEL 510
Top Mount, Pull Up Telescopic Pole


- 3.25" round mounting flange is standard
- 2.5" square flange is available other 510C and 510E (see insets)

OPTIONS:

- CL (custom length pole)
- SW (raised pole switch and indicator)
- TW (wire out of the top of the pole)

MODEL 510C
 Model 510 pole with a Square Flange Option

MODEL 510E
 Model 510 pole with a Square Flange Option for mounting in a 3" extrusion




MODEL 512
Thru The Roof, Push Up Telescopic Pole

- Extension pole has a knurled aluminum push-up handle
- A round, "no drip" mounting flange is provided

No-Drip Thru the Roof, Push up Pole

OPTIONS:

- CL custom length pole)
- SW (raised pole switch and indicator)
- TW (wire out of the top of the pole)
- SR (steady rest bottom bracket)



MODEL 530
Side Mount, Push Up Telescopic Pole

- Extension pole has a knurled aluminum push-up handle
- Outer tube is grooved aluminum extrusion and qualifies as a NFPA compliant handrail
- Standard outer tube (shown) is 20". Choosing an optional 10" outer tube allows for a 40" extension

OPTIONS:

- CL (custom length pole)
- SW (raised pole switch and indicator)
- TW (wire out of the top of the pole)
- SR (steady rest bottom bracket)
- ST (10" outer tube)

FEATURES

- All FRC telescopic poles are made of anodized aluminum for maintenance free performance and longer service life.
- All extension poles rotate 360°
- All extension poles have the exclusive TwistLock mechanism to secure the pole in position.
- All standard extension poles have a four foot retractable cord extending from the bottom for direct wiring.
- All outer tubes have a grooved surface
- All pole mounted lampheads have a pivot in the mounting arm with a knurled knob to adjust the angle of elevation.

PATENTED SAFETY TWISTLOCK

- Easy to use and can be operated in either direction.
- It can not jam or be over tightened.
- There is no protruding handle to snag gear or straps on.
- Knurled surface for a firm grip.
- The locking mechanism has no metal to metal contact. This spares the anodized aluminum poles from unnecessary wear and tear.





MODEL 540

Side Mount, Pull Up Telescopic Pole

- An internal brake slows the extension pole during lowering
- Outer tube is grooved aluminum extrusion and qualifies as an NFPA compliant handrail

OPTIONS:

- CL (custom length pole)
- SW (raised pole switch and indicator)
- TW (wire out of the top of the pole)



MODEL 542

Side Mount, Pull Up Telescopic Pole

- Outer tube is grooved aluminum extrusion and qualifies as an NFPA compliant handrail
- Standard outer tube (shown) is 20". Choosing an optional 10" outer tube allows for a 43" extension

OPTIONS:

- CL (custom length pole)
- SW (raised pole switch and indicator)
- TW (wire out of the top of the pole)
- ST (10" outer tube)

All FRC pole brackets are adjustable along the pole.


SIDE MOUNT BRACKETS

Supplied as Pair



Side Mount Bracket Dimensions

All Dimensions in Inches

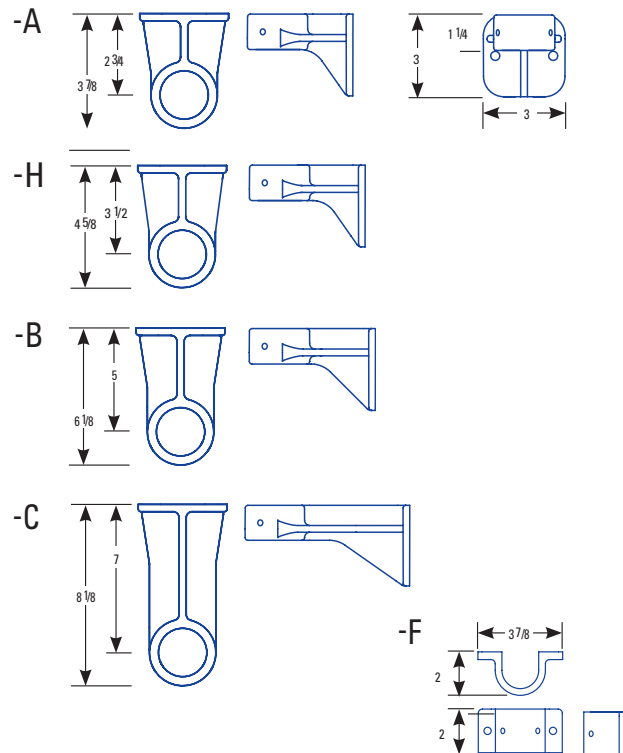


GROOVED GRAB HANDLE

- FRC's exclusive GRAB-HANDLE is a standard feature on all 530, 540 and 542 telescopic poles.
- It provides a secure grip when wearing heavy gloves.
- The grab handle qualifies as an NFPA compliant handrail.




OPTIONAL MOUNTS



-SR

Optional Steady Rest

Steady Rest bracket provides added bottom support for "inside pole" when it is in the retracted (down) position. Bracket can be used with 512 and 530 push-up poles.



-F

Optional Flush Mount

Flush mount brackets allow poles to securely mount flush to a surface. Total width is 3.875". Supplied as pair.



KWIK-RAZE® TELESCOPIC POLES



SINGLE BOLT MOUNTING

- Machined from solid billet aluminum for strength and durability
- Enhanced appearance with bright dip anodized finish
- Compact design reduces mounting surface area by 80% to allow for more versatile applications
- Each set of brackets can hold over
- 1200 lbs.

MODEL 200
Side Mount, Pull Up Telescopic Pole

- 48" inner telescoping pole, 58" outer pole
- Concealed coil cord

OPTIONS:

- I (raised pole switch and indicator)
- NCW (non-concealed wire)



MODEL 300
Thru Body, Pull Up Telescopic Pole

- 48" inner telescoping pole, 58" outer pole
- Concealed coil cord

OPTIONS:

- I (raised pole switch and indicator)
- NCW (non-concealed wire)



MODEL 400
Thru Body, Push Up Telescopic Pole

- 48" inner telescoping pole, 12" outer pole
- Concealed coil cord

OPTIONS:


- I (raised pole switch and indicator)
- NCW (non-concealed wire)
- R (lower receiver bracket)


OPTIONAL MOUNTS

- R**
Lower Receiver Bracket
- Provides additional support when mounting push-up poles.



- WxP**
Bracket Mounting Plate
- Makes bolting equipment to light-gauge body walls stronger
 - Hardware and gasket included
 - Adds 1/2" to any offset bracket
x = length in inches



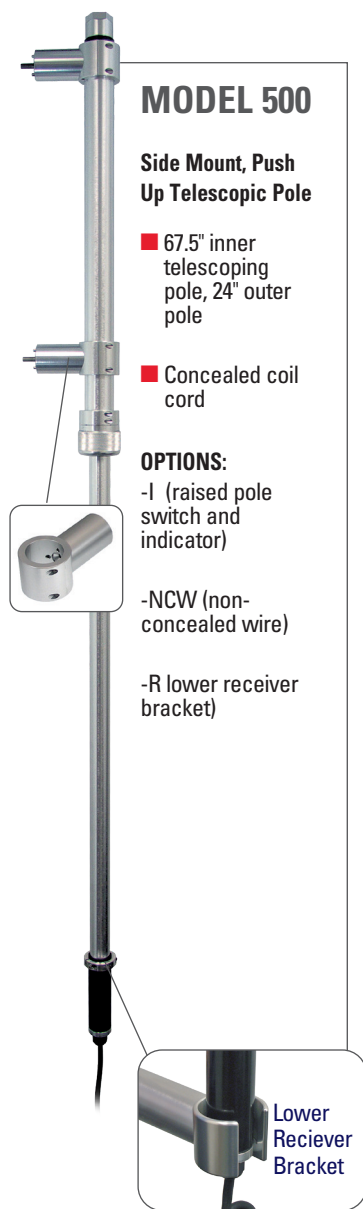



MODEL 500

Side Mount, Push Up Telescopic Pole


- 67.5" inner telescoping pole, 24" outer pole
- Concealed coil cord

OPTIONS:

- I (raised pole switch and indicator)
- NCW (non-concealed wire)
- R lower receiver bracket

Lower Receiver Bracket

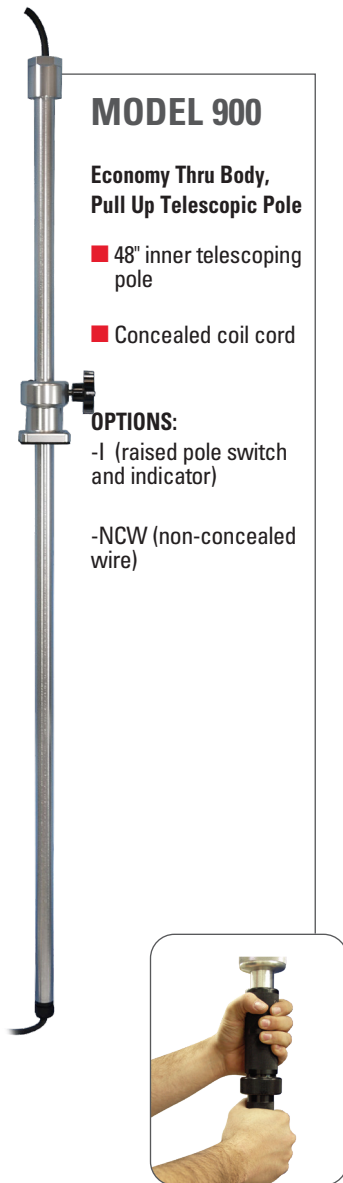


MODEL 900

Economy Thru Body, Pull Up Telescopic Pole


- 48" inner telescoping pole
- Concealed coil cord

OPTIONS:

- I (raised pole switch and indicator)
- NCW (non-concealed wire)



SIDE MOUNT BRACKETS
Supplied as Pair

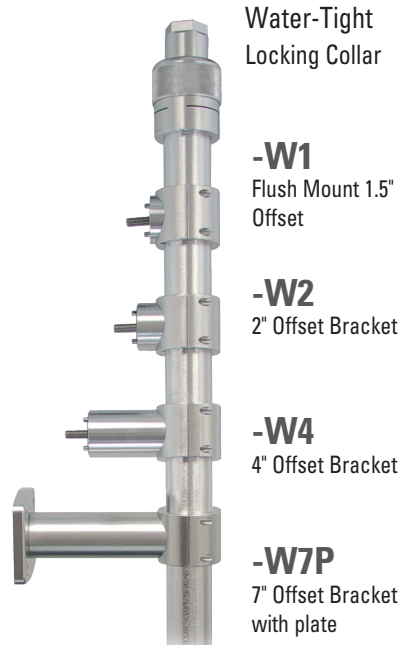


- Water-Tight Locking Collar
- W1 Flush Mount 1.5" Offset
- W2 2" Offset Bracket
- W4 4" Offset Bracket
- W7P 7" Offset Bracket with plate



TWO-PIECE SIDE MOUNT BRACKETS


Allows poles to be easily installed & removed from the truck for service without removing the brackets from the truck.




TWISTLOCK

TELESCOPIC POLES TECHNICAL SPECIFICATIONS


TWIST-LOCK TOP MOUNT POLES

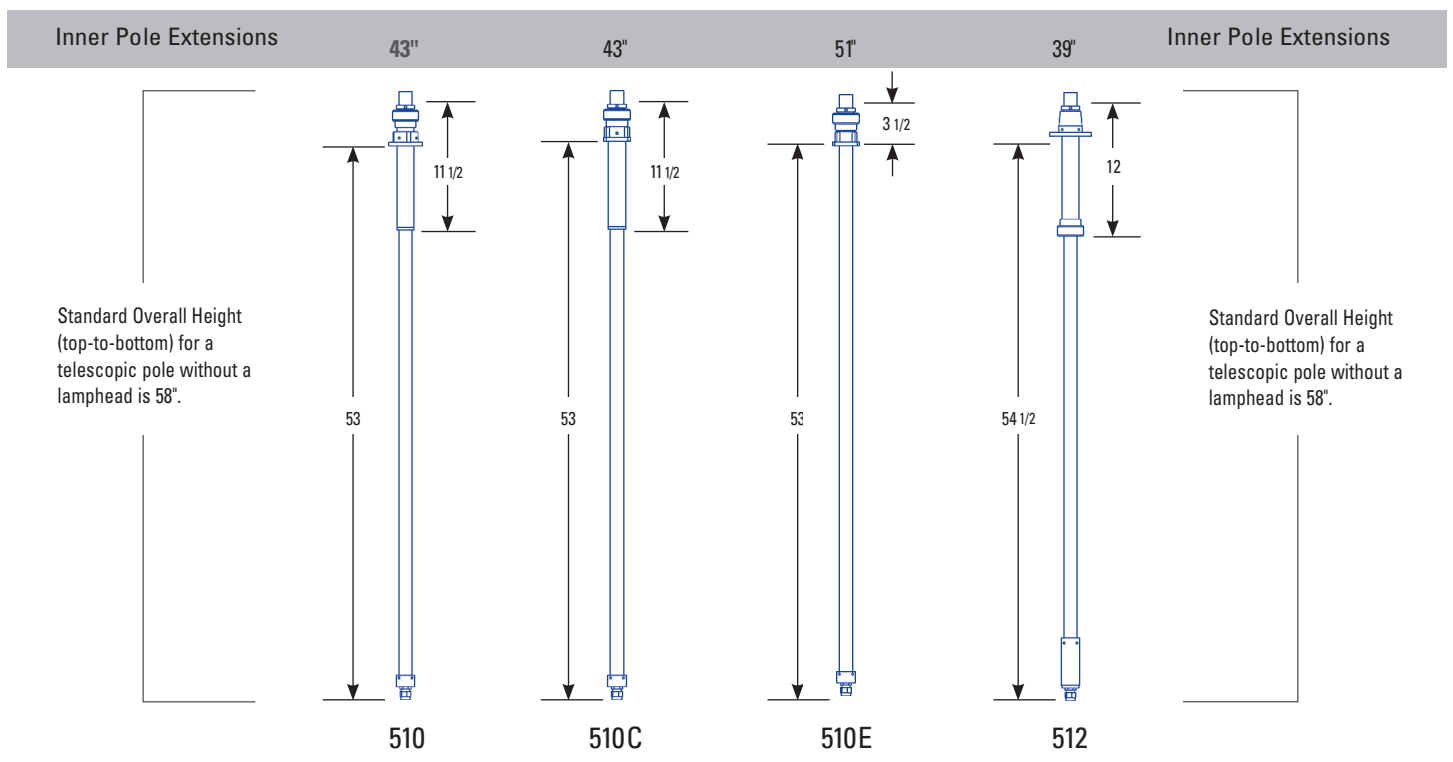


TWIST-LOCK SIDE MOUNT POLES

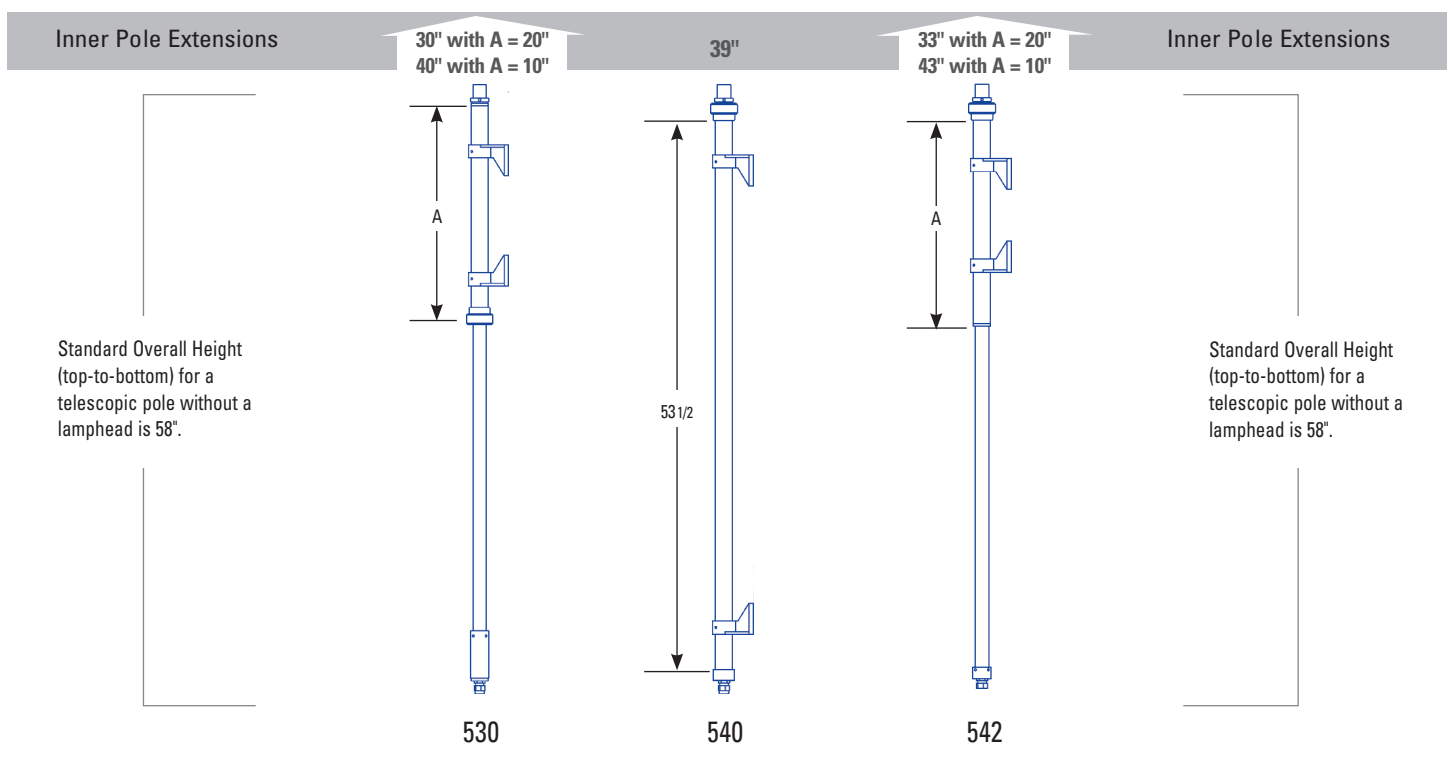

KWIK-RAZE TOP MOUNT POLES

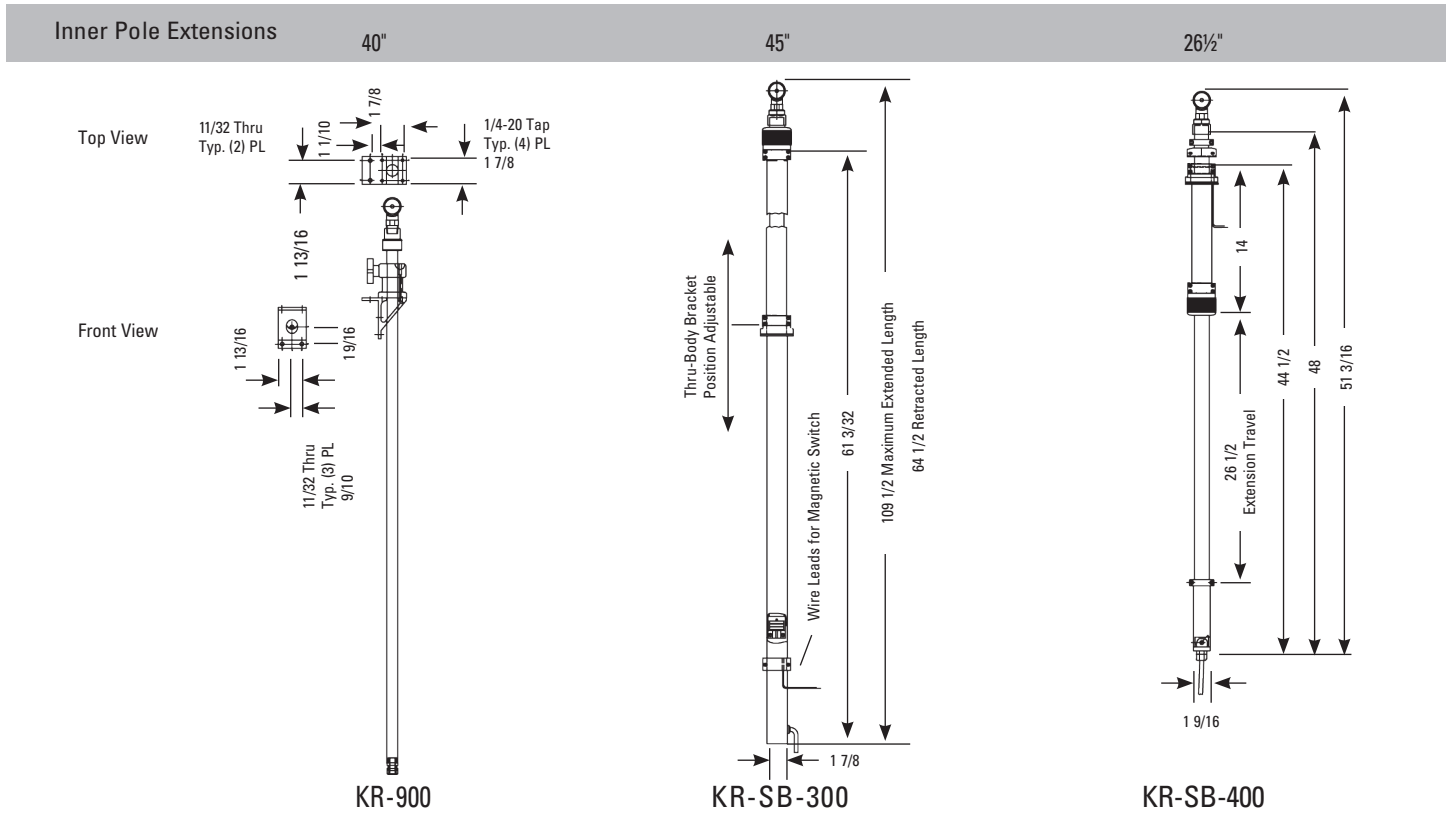

KWIK-RAZE SIDE MOUNT POLES

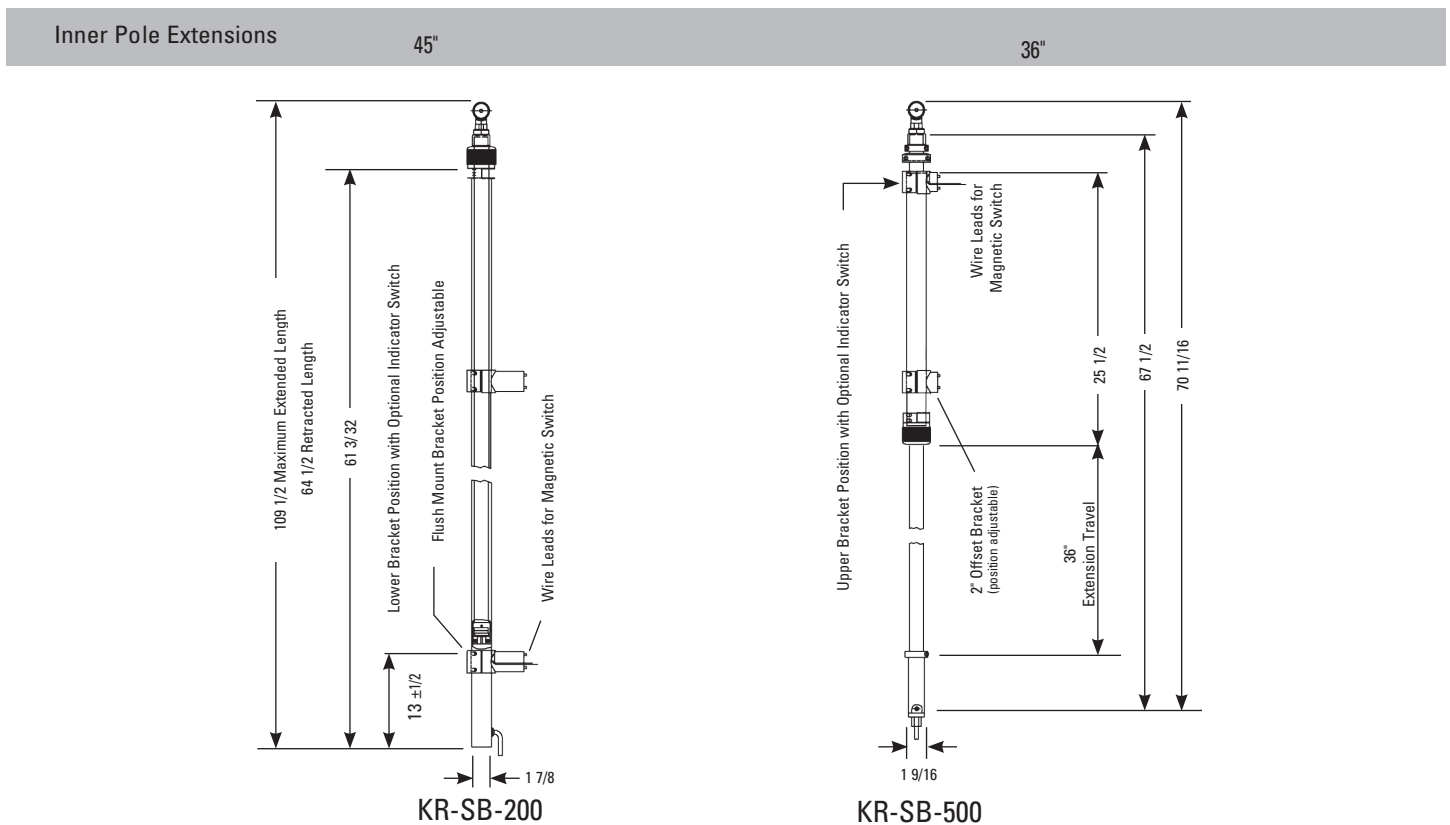




SPECTRA with fixed top mount shown

300 UNDER AERIAL

The 300 adjustable aerial mounting brackets allow the EVOLUTION II and FOCUS lamphead to be mounted under an aerial bucket or platform. Aim the light forward or directly downward. Commonly set at 30° downward as shown.

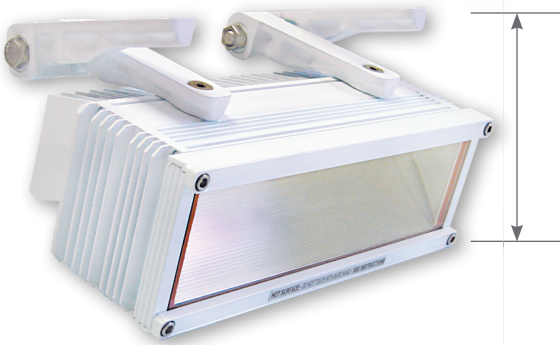

REQUIRED CLEARANCE

- Aimed Directly Forward - 4"
- Aimed At 30° Downward - 6.5"
- Aimed At 45° Downward - 6.75"
- Aimed Straight Down - 7.5"

KR-SB-600 FIXED TOP MOUNT

The KR-SB-600 fixed top mount includes a two-piece locking collar and is designed to allow for easy 360 degree rotation.

- Also available with clamping lever (KR-SB-600-L)






EVOLUTION II with fixed top mount

**570
FIXED TOP MOUNT**

More than a simple top mounted base, the 570 allows for a full 450° of rotation. This means that light coverage can be a full circle, plus another quarter turn which ensures no blind spots. The 570 base has a built-in stop to prevent the internal wiring from binding.

A built-in friction mechanism ensures the light will not rotate when the vehicle is in motion.

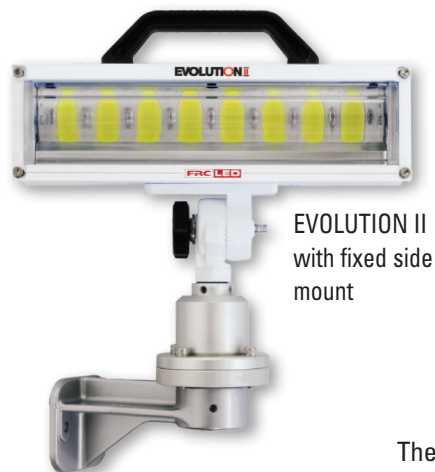

EVOLUTION II with fixed side mount



SPECTRA with fixed side mount

**580
FIXED SIDE MOUNT**

The 580 side mounted, fixed pedestal light allows the lamphead to rotate 450° and has a self adjusting friction brake to prevent arbitrary rotation.

The pedestal has around mounting base attached to a side mount bracket.

SPECTRA lampheads use a 2.75" bracket.


EVOLUTION II & FOCUS lampheads use a 3.5" bracket.



FOCUS with fixed side mount

LIGHT OPTIONS

SPECTRA AND EVOLUTION II

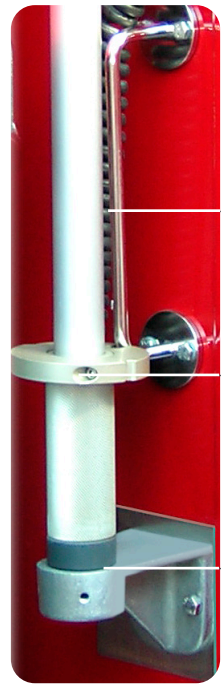

Guide Rail

Guide Collar

Steady Rest Bracket
Available with 3.5" or 5" brackets.



-NS

PATENTED NO-SCRATCH OPTION

Ordered with the 530 pole by adding the suffix -NS to the part number.

-NS Option includes:

- (2) Rubber Bumpers (FOCUS & EVOLUTION II only)
- (1) Guide Collar & Guide Rail
- (1) Steady Rest Bracket

FC-NS31K

The Rubber Bumpers can be ordered separately and installed on all standard FOCUS lampheads.

FC-NS31K Kit includes:

- (2) Rubber Bumpers
- (2) 1/8" Rivets with Backing Plates

FC-NSK

The No-Scratch option can be retrofitted on existing 530 poles.

FC-NSK Kit includes:

- (1) FC-NS31K Kit
- (1) Guide Collar & Guide Rail Assembly

Note: It is recommended that the Steady-Rest bracket be installed with the No-Scratch retrofit kit. Order FC-NSK-SR

FOCUS


NO SCRATCH GUIDE & RUBBER BUMPERS PREVENTS SCRATCHING & DENTING

The No-Scratch option combines a guide collar and guide rail assembly, a steady-rest bracket, and two rubber bumpers on the lamphead (FOCUS & EVOLUTION II only) to prevent scratching and denting of apparatus body surfaces. The complete No-Scratch option is available on 530 side mount, bottom raise, telescopic pole.

When the pole is raised the guide collar disengages from the guide rail and the lamphead is free to rotate 360°. As the pole is lowered the guide collar engages the guide rail. The guide collar and rail prevents the pole from being lowered if the lamphead is not correctly aligned.

RUBBER BUMPERS

Rubber Bumpers are available as an option on most FOCUS and EVOLUTION II lampheads

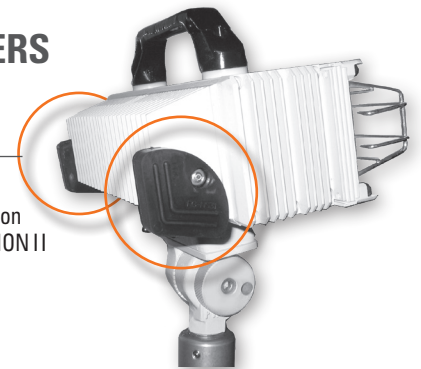


RAISED POLE INDICATOR & SWITCH

In order to alert the vehicle operator that an extendable pole is raised, FRC offers a switch and indicator option for all permanently mounted telescopic poles. The parts associated with this option will differ depending upon the type of pole in question.

Note: To retrofit this option the type of pole being used needs to be specified when ordering.



If retrofitting this option on a 530 push-up pole the steady rest lower bracket is required.

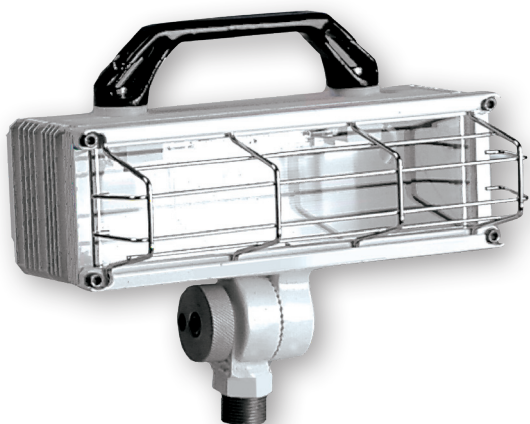

WIRE GUARD

When retrofitting a wire guard on a FOCUS lamphead not originally fitted with one order the FC150-S or FC150-M kit. Wire Guards are not available on Model 200, 230, and 250 recessed mounts.



WIRE EXITS FROM TOP OF POLE NON-CONCEALED WIRE

For most permanently mounted lampheads the power cord exits through the bottom of a pole assembly. Specifying this option will bring the power cord out of the top of the pole or lamphead.

AC PLUGS

- P1 Nema 5-15 Straight (household type) plug
- P3 Nema L5-15 3-Prong twist lock plug




-P1



-P3

ON/OFF LAMPHEAD SWITCH

On SPECTRA, EVOLUTION II and FOCUS lampheads a switchbox is provided underneath the lamphead.

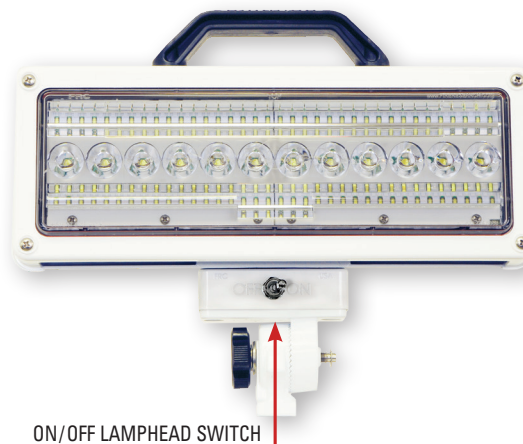

CUSTOM LENGTH POLE

FRC telescopic poles can be shipped pre-cut to a custom length. Total length will include pole and lamphead.

(Some restrictions apply)



ORDERING INSTRUCTIONS

SPECTRA, EVOLUTION II, FOCUS, SO BRITE

4 SIMPLE STEPS Follow the four steps shown below to get your final product number. Need help? Call us.

1

Indicate the
LIGHT PREFIX

- SPA**
for SPECTRA
- FCA**
for EVOLUTION II
- FCA**
for FOCUS
- SRA**
for SoBRITE



SPA

2

Choose a
POLE STYLE OR MOUNT

- Poles**
- 510
- 510C
- 510E
- 512
- 530
- 540
- 542
- Tripods**
- 600
- 642
- 656
- Fixed Mounts**
- 100
- 110
- 200
- 210
- 250
- 260
- 300
- 300U
- 570
- 580
- KR700
- 900
- 950
- Brow Mounts**
- 800
- 830
- 850
- .
- .
- .



530

3

Choose a
LAMPHEAD

- Q15
- Q20
- Q28
- Q50
- Q70
- K15
- K20
- K28
- J15
- J20
- J28
- A28
- B28
- C28
- R14
- T14
- U14
- 07A
- 07B
- 07C
- V11
- V15
- V20
- S30
- S50
- S75
- M10
- M12
- M15
- D15
- D30



-K20

4

Choose
OPTIONS


- F flush mount bracket
- SR steady rest bracket
- CL custom length pole
- G wire guard
- NS no-scratch guide kit
- RB rubber bumpers
- ST 10" outer tube
- Electrical**
- ON on/off switch
- SW raised pole indicator & switch
- TW wire exits top of pole
- Brackets**
- A
- B
- C
- H
- 603
- 6F3



-ON



= SPA530-K20-ON

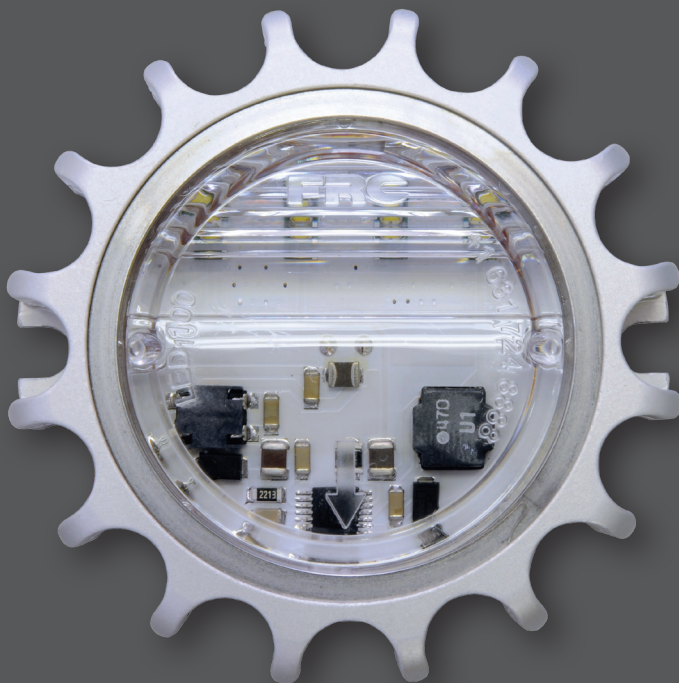


FIREFLY™ MOST COMPACT ULTRABRIGHT WHITE LED LIGHT FOR COMPARTMENTS, PANELS & UNDER BODY APPLICATIONS


FEATURES

- Small and Compact - Four (4) white, long life LEDs
- UltraBright 650 lumens light output
- Mounts in any orientation & on any flat surface
- 12 VDC-0.8 Amps / 24 VDC-0.4 Amps
- Low power consumption saves energy
- Instant on at full intensity
- Can be used in compartments, on panels, and for ground or surface lighting
- The LEDs are housed in a waterproof anodized aluminum case, built tough for all environments

LED 110 FLOOD BEAM for wider illumination
LED110 - Q01 WORK LIGHT PERFECT FOR UNDER VEHICLE



LED 100 DIRECTED BEAM for focused light
LED100 - Q01 COMPARTMENT LIGHT WITH GLARE REDUCING LENS



LED100, LED110

Model	W	D
Q01	2 5/8	3/4



Shown with standard yoke mount (model SRA100)

SOBRITE™ COMPACT, ULTRABRIGHT LED LIGHT



MOUNTS ALMOST ANYWHERE

SoBrite LED easily retrofits to existing Collins Dynamics® FX and Unity AG-L mounting bases.


Shown with fixed mount (model SRA110) and optional black housing



FEATURES




- 7,000 lumens of intense LED light
- Built tough for long life in the harshest environments
- Versatile design offers multiple mounting options
- Ideal LED upgrade for your existing vehicles
- 12/24 VDC - 5/2.5 Amps

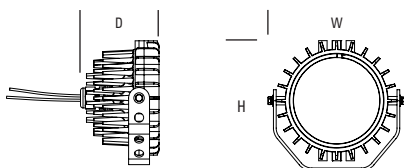

SRA100

Model	W	D	H
07A	6 1/4	3 3/4	5 15/16


THREE MODELS, THREE LIGHT PATTERNS

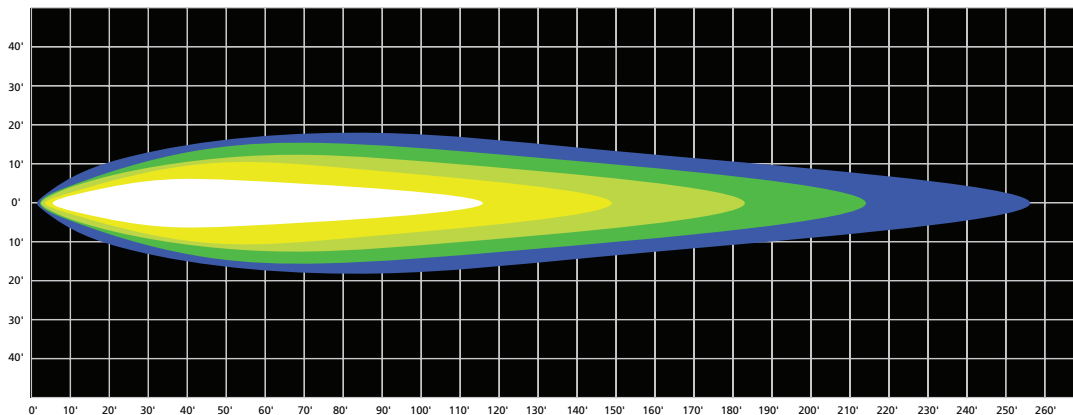

MODEL SPA850

SPOT PATTERN:


A focused and concentrated long range light beam for illuminating objects in the distance.

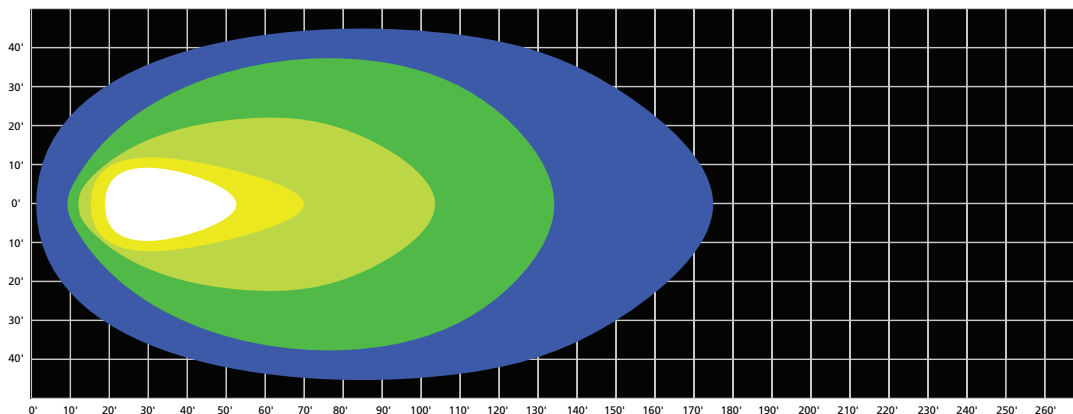

MODEL SRA100-07B

FLOOD PATTERN:


Widest pattern of light that is perfect for evenly illuminating the work area.

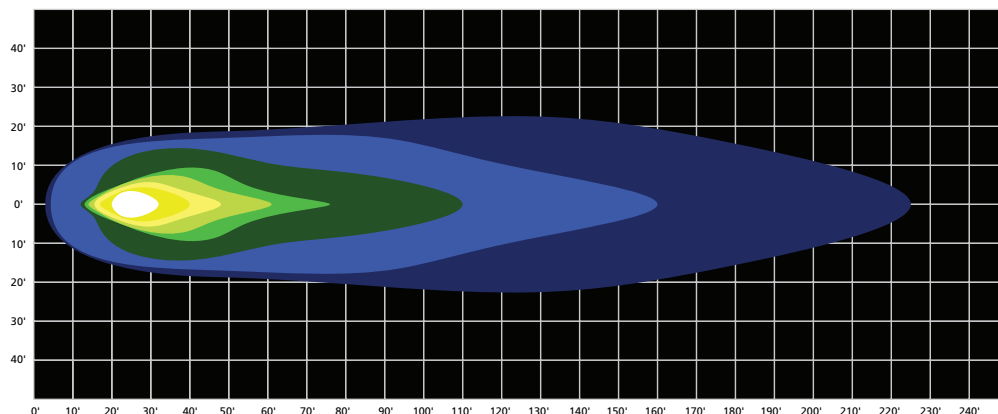

MODEL SRA100-07C

TRAPEZOID PATTERN:

Wider than a spot and longer than a flood, this light pattern is ideal as a general-purpose work light. Ideal for mounting on front of vehicle for increased visibility while driving.






HIGH PERFORMANCE LED INTERIOR LIGHTING

DUROLUMEN™

FEATURES

- Reverse polarity and over/under voltage protected
- Easy retrofit – fits Grote and TruckLite hole patterns: 3.5" x 16" x 1"
- Recessed housing – Nearly flush mount pan fits tight along walls and ceilings

Part No.	Description	Voltage	Amps	Lumens
R03696	Surface mount. White/White offers high or low beam intensity switching (user supplied switch)	9–16 VDC	2.5 high 1.25 low	2,800 high 1,400 low
R03694	Surface mount. White only	9–16 VDC	1.25 low	1,400
R03695	Recessed mount. Red/White offers high or low beam intensity switching (user supplied switch)	9–16 VDC	1.25 low	1,400 white 500 red
R03850	Recessed mount. White/White offers high or low beam intensity switching (user supplied switch)	9–16 VDC	2.5 high 1.25 low	2,800 high 1,400 low
R03848	Surface mount. White only	9–16 VDC	1.25 low	1,400
R03849	Recessed mount. Red/White offers high or low beam intensity switching (user supplied switch)	9–16 VDC	1.25 low	1,400 white 500 red

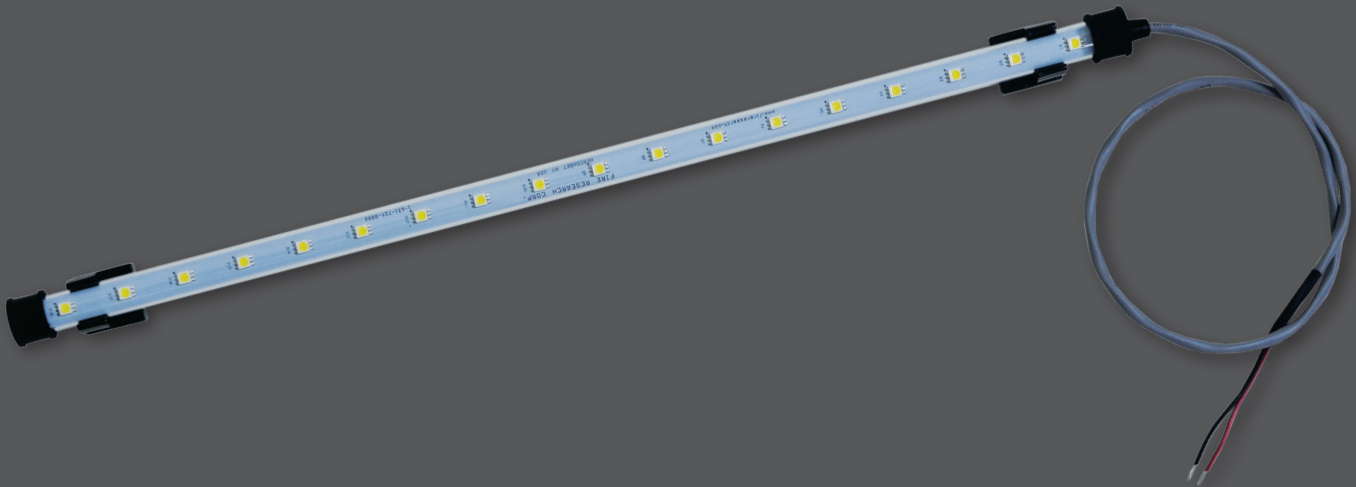


SUNSTRIP™ ULTRABRIGHT WHITE LED LIGHT FOR COMPARTMENTS, PANELS, UNDER BODY APPLICATIONS, WALKWAYS & STAIRWAYS

FEATURES

- UltraBright strip light – More than 300 lumens of LED Light per 18" length
- LEDs housed in a strong 5/8" diameter lexan tube
- Designed tough to withstand any vehicle vibration
- Waterproof and submersible
- Great for all applications
- Easy to install
- Long operating hours – Rated at 50,000 hours
- Available in 9" length increments from 9" to 63"


Part No.	Lumens	Current @ 12V
LED200 - A09	150	0.17 amps
LED200 - A18	300	0.35 amps
LED200 - A27	450	0.52 amps
LED200 - A36	600	0.70 amps
LED200 - A45	750	0.87 amps
LED200 - A54	900	1.05 amps
LED200 - A63	1050	1.22 amps

*Add 2" for end caps & wire clearance
Mounting clips supplied • 24V also available



LED200, LED201

Model	W	D	H
A09	10 1/8	1 1/16	1
A18	19 1/8	1 1/16	1
A27	28 1/8	1 1/16	1
A36	37 1/8	1 1/16	1
A45	46 1/8	1 1/16	1
A54	55 1/8	1 1/16	1
A63	64 1/8	1 1/16	1





MODEL: LED330



MODEL: LED310



MODEL: LED300



MODEL: LED350

WORKPRO™ WORK AREA, ULTRA BRIGHT LED LIGHT SERIES

**RUGGED COMPACT,
VERSATILE AND
POWERFUL**

- Delivers outstanding light output
- Built tough for long life in the harshest environments
- Robust cast aluminum housings with polycarbonate lens

- Protected against shock, RFI/EMI interference, voltage surges, UV and reverse polarity
- IP67 or IP68 compliant against dust & water ingress
- Extremely affordable
- Many model sizes/available in black or white

PART NO. DESCRIPTION W/MOUNTING BRACKET

LED300 - A01	LED, SPOT, 12/24 VDC, 20W, Square 3"x 3 3/32", 1800 lumens
LED300 - B01	LED, FLOOD, 12/24 VDC, 20W, Square 3"x 3 3/32", 1800 lumens
LED310 - A03	LED, SPOT, 12/24 VDC, 35W, Round 5 5/8", 3500 lumens
LED310 - B03	LED, FLOOD, 12/24 VDC, 35W, Round 5 5/8", 3500 lumens
LED320 - A03	LED, SPOT, 12/24 VDC, 35W, Square 5 1/2", 3500 lumens
LED320 - B03	LED, FLOOD, 12/24 VDC, 35W, Square 5 1/2", 3500 lumens


PART NO. DESCRIPTION W/MOUNTING BRACKET

LED330 - A01	LED, SPOT, 12/24 VDC, 26W, Square 5 1/2", 1800 lumens
LED330 - B01	LED, FLOOD, 12/24 VDC, 35W, Square 5 1/2", 1800 lumens
LED340 - A07	LED, SPOT, 12/24 VDC, 78W, Round 7 1/2", 7200 lumens
LED340 - B07	LED, FLOOD, 12/24 VDC, 78W, Round 7 1/2", 7200 lumens
LED350 - A07	LED, RECESSED, 12/24 VDC, 18W, 7 11/16"x 2 7/16", 1620 lumens




ALL MODELS AVAILABLE IN SPOT OR FLOOD


WORKPRO LED-3xx SERIES




MODEL: LED300




MODEL: LED310



MODEL: LED320/330



MODEL: LED340

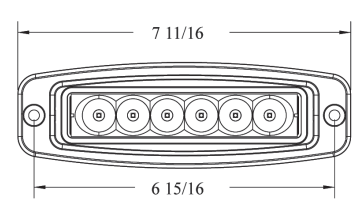

MODEL: LED350



MODEL LED400 A06-W (WHITE)



MODEL LED400 A06-B (BLACK)

REMOTE CONTROL, ULTRABRIGHT LED LIGHT VANTAGE POINT™

REMOTE CONTROL, ULTRABRIGHT LED LIGHT

- 16 LED lights provide 7,000 lumens of brightness
- Lightweight, die-cast magnesium housing
- Vertical tilt 70° and 45° downward
- Two hand-held remote controllers supplied with each unit

- Versatile design offers multiple mounting options
- Ideal LED upgrade for your existing vehicles
- Connects to any 12/24 VDC power source

360° CONTINUOUS ROTATION



- Rotation range is infinite
- Rotates both clockwise and counterclockwise

HAND-HELD REMOTE CONTROL

- 16 LED lights provide 7,000 lumens of brightness
- Lightweight, die-cast magnesium housing
- Vertical tilt 70° and 45° downward
- 360° infinite rotation
- Mounting brackets provided



VANTAGE POINT LED400 A06

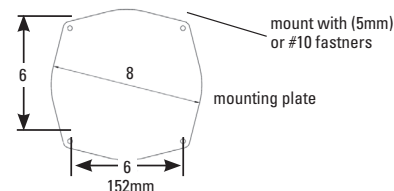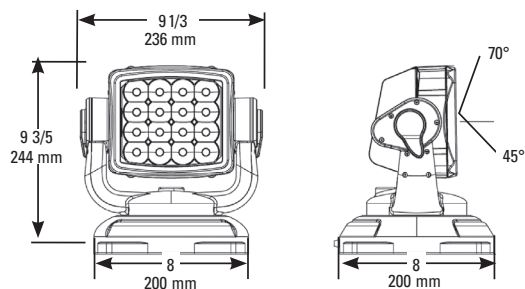


FLASHING ALERT WARNS MOTORISTS OR PEDESTRIANS OF POTENTIAL HAZARDS AHEAD

Old Halogen/HID New LED

BRIGHTER SCENES & SAFER FIRE GROUNDS


SAFER, WHITER & BRIGHTER

LEDs Produce More Light

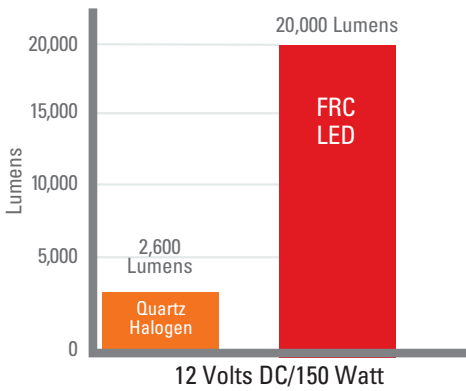


A quartz halogen bulb utilizes 8% of the energy supplied to produce light. By comparison, LEDs use 40% of the supplied energy to produce light.

LEDs Are More Efficient

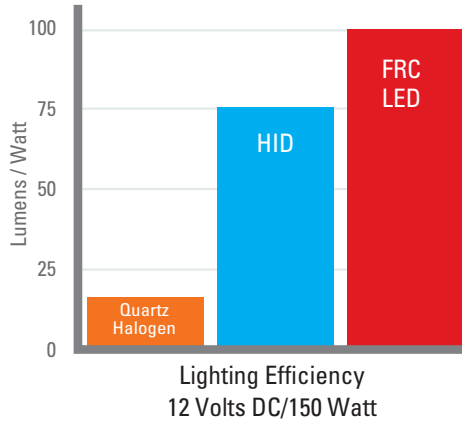

Different types of light sources that use the same amount of power (watts) can have very different luminous efficacy (lumens/watt) and therefore different lighting efficiency.

LEDs Outlast Traditional Bulbs

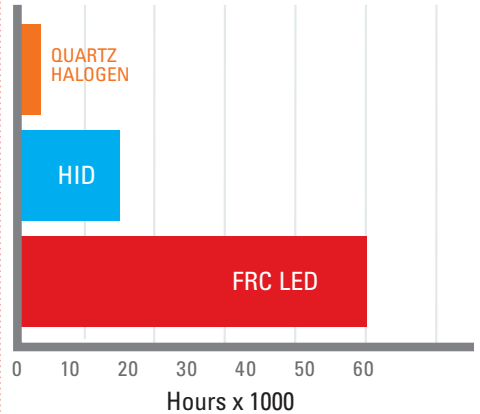

- The typical operational life of an LED is 50,000 hours compared to the average life of an incandescent bulb, which is approximately 2,000 hours.
- LEDs can operate well past the lifetime of the average apparatus.
- Because of their inherent solid state design without filaments, LEDs are much more rugged than incandescent bulbs and can better withstand shock and vibrations.

HALOGEN AND HID TO LED RETROFIT

UPGRADE TO LED LIGHTING


FOCUS[®]

OPTIMUM

**OPTIMUM
HID**

COLLINS

SPECTRA



EVOLUTION II



SPECTRA MS



SOBRITE



**SEE MORE.
DO MORE.
SAVE MORE.**

INCREASE SAFETY, SIMPLE ORDER AND INSTALL.

- Easy order
- Drop-in replacement
- Safer scenes
- Simple installation
- Use existing wiring
- Less power
- No maintenance

LED LIGHT UPGRADE

UPGRADE TO SPECTRA OR SOBRITE LED LIGHTING NOW FOR SPECIAL PROMOTION PRICING!

Replace your Optimum, Focus and Collins Halogen and HID lighting with superior LED technology and improve your scene lighting. Contact your dealer with your current FRC model number to be replaced or visit upgradeyourlights.com to learn more. It's that quick and easy.

FRC

04-2022

Copyright ©2022 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

www.fireresearch.com
+1 631.724.8888
sales@fireresearch.com

SAFE  FLEET
Driving Safety Forward™